



Modifying the power supply cable for POE in a Cisco 1941 Router


- 1) Remove the main power cable between the power supply and the system board on the router.

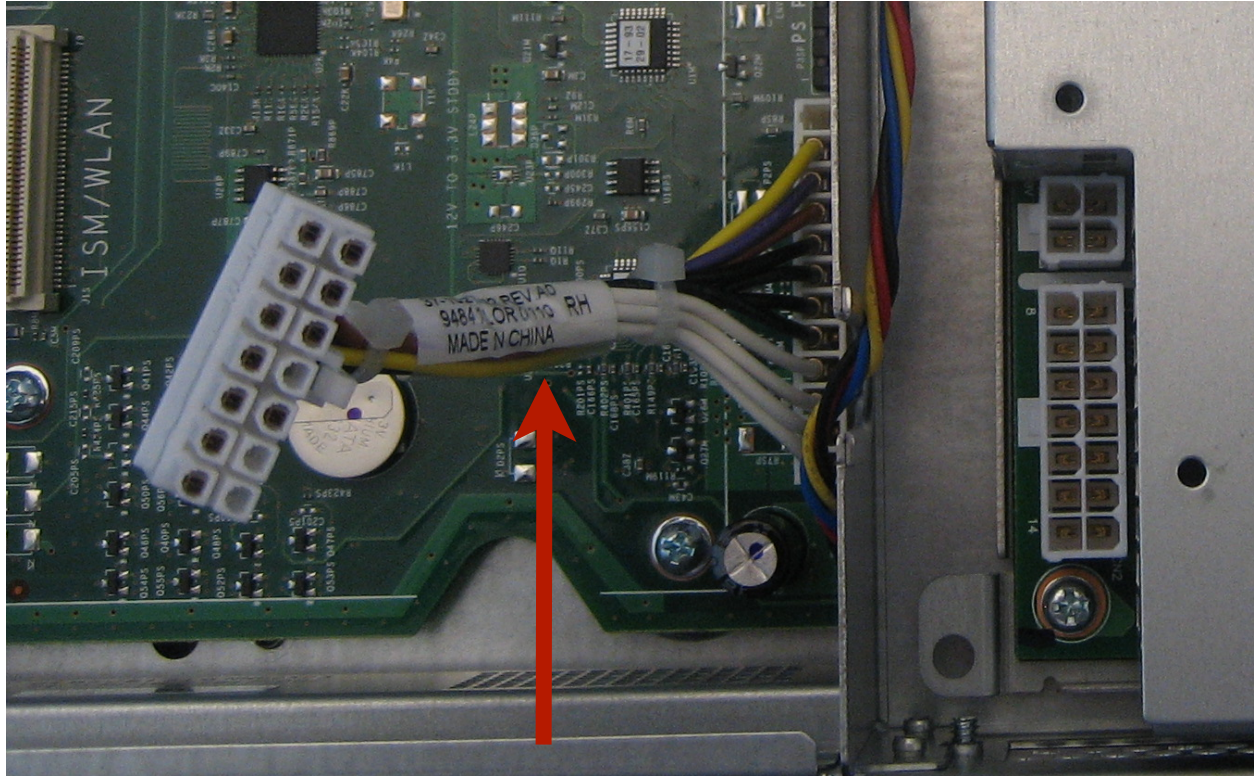


- 2) Locate the pin that needs to be removed. It is the black wire that is to the left of the brown wire:

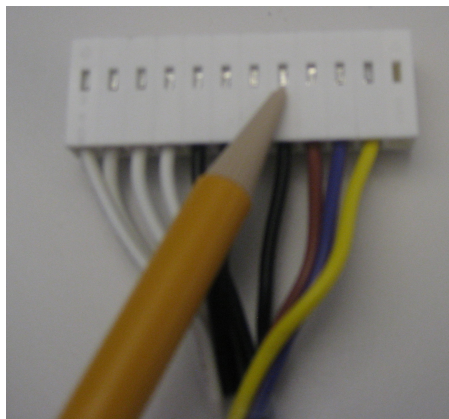

3) Insert a small slotted screwdriver in the slot for this pin and gently pull the wire out of the harness:

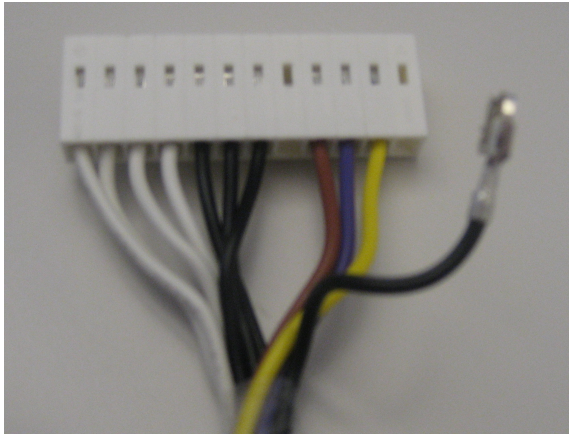

4) Insert this pin into the last the slot on the harness, to the right of the yellow wire:

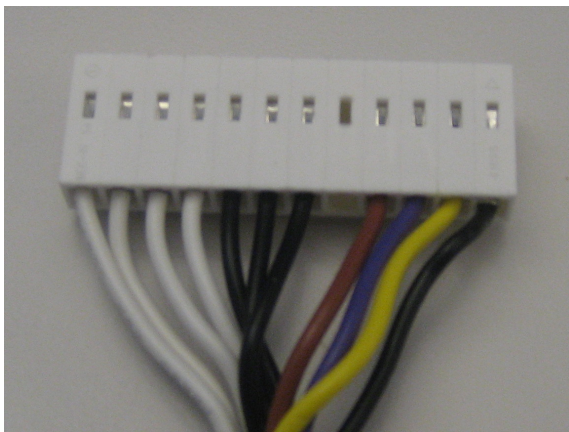

5) Reinstall this cable between the router's system board and the power supply along with the un-modified 4-pin blue ILP cable.