



## Current Setup

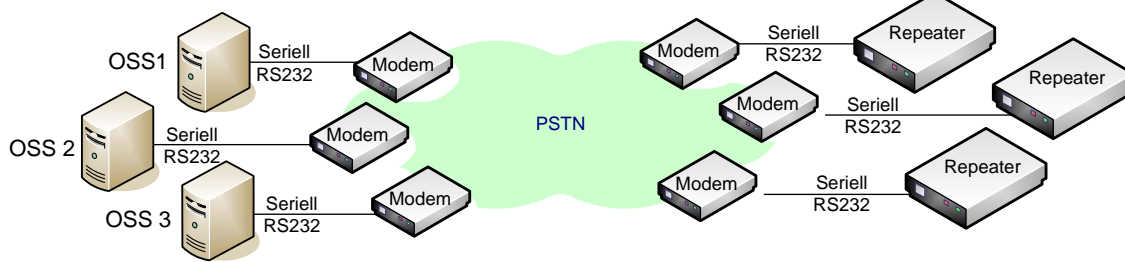

## New Setup

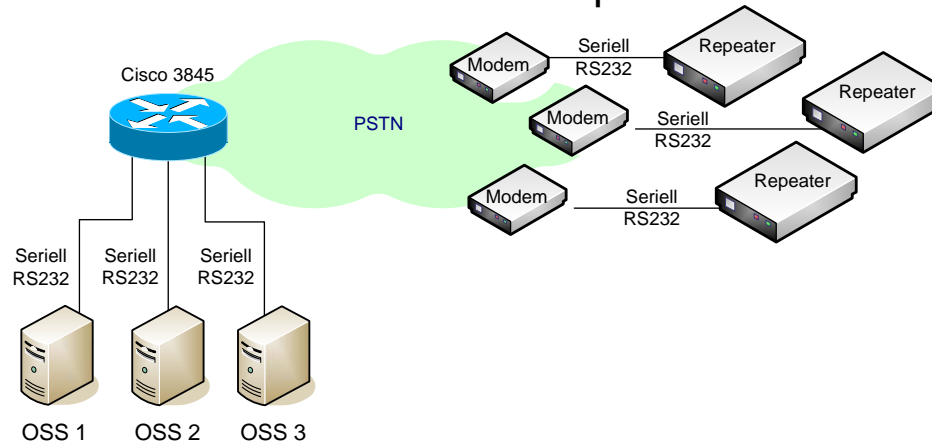

### Appendix to the current Setup:

As it works today:

1. Configuring the repeater from the according OSS. Depending the manufacturer of the repeater a different OSS will be used.
2. If the repeater detects a failure it dials-in and alerts to the according OSS.

The manufacturer of the repeater appoints which OSS will be connected

### Appendix to the New Setup:

My task is to configure the setup as it works today.

1. Configuring the repeater from the according OSS. Depending the manufacturer of the repeater a different OSS will be used.
2. If the repeater detects a failure it dials-in and alerts to the according OSS.

The manufacturer of the repeater appoints which OSS will be connected