


Router A




Router A is unable to ping serial 1/0/0 on router b, there is no physical connection between router a and router c

Router B

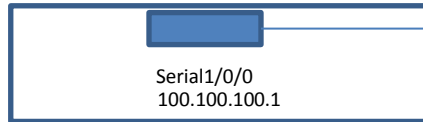

Router B can ping all the interfaces on the network because, router has a physical connection to each router

Router C

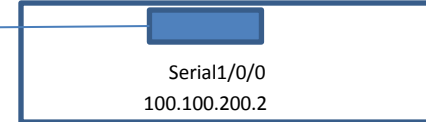

Router C is unable to ping Router A, because there is no physical connection between Router C and Router A

How to solve this issue between C and A , static route only works to serial1/0/0 on router b.