

# Baseline Scenario Diagram and configuration

## ASR9K Configuration


```
interface BVI598
  mtu 9180
  ipv4 address 98.98.98.11 255.255.255.0
```

```
l2vpn
  bridge group star-MonitorSW-5012
  bridge-domain VLAN598
  mtu 9180
  vfi 598
  neighbor 192.168.10.7 pw-id 510590598
  routed interface BVI598
```

## ASR903 configuration

```
l2 vfi 598 manual
vpn id 510590598
bridge-domain 598
mtu 9180
neighbor 172.16.10.11 encapsulation mpls
```

```
interface GigabitEthernet0/5/5
  mtu 9180
  no ip address
  negotiation auto
  no keepalive
  service instance 598 ethernet
  encapsulation default
  bridge-domain 598
```

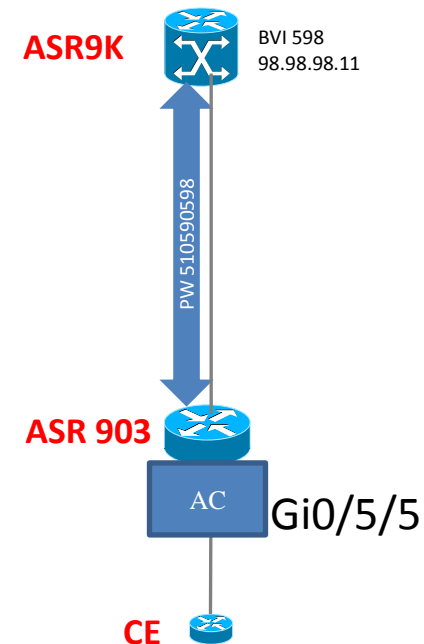

## CE Configuration

```
interface GigabitEthernet0/5/5
  ip address 98.98.98.7 255.255.255.0
  negotiation auto
```