

Proposed crypto map MYMAP local-address GigabitEthernet0/0/0.3

```
interface GigabitEthernet0/0/0.2
description PRIVATE-IPs
ip address 192.168.2 255.255.255.0
ip nat inside
standby 2 ip 192.168.0.1
standby 2 timers msec 200 msec 650
standby 2 priority 150
standby 2 preempt delay reload 99
standby 2 name Vlan2
standby 2 track 1 decrement 60
cdp enable


!

interface GigabitEthernet0/0/0.3
description PUBLIC-3
encapsulation dot1Q 3
ip address X.X.3.2 255.255.255.0
standby 3 ip X.X.3.1
standby 3 timers msec 200 msec 650
standby 3 priority 150
standby 3 preempt delay reload 99
standby 3 name Vlan3
standby 3 track 1 decrement 60
cdp enable
```

```
interface GigabitEthernet0/0/0.2
description PRIVATE-IPs
ip address 192.168.3 255.255.255.0
ip nat inside
standby 2 ip 192.168.0.1
standby 2 timers msec 200 msec 650
standby 2 name Vlan2
cdp enable

!

interface GigabitEthernet0/0/0.3
description PUBLIC-3
encapsulation dot1Q 3
ip address X.X.3 255.255.255.0
standby 3 ip X.X.3.1
standby 3 timers msec 200 msec 650
standby 3 preempt
standby 3 name Vlan3
cdp enable
```

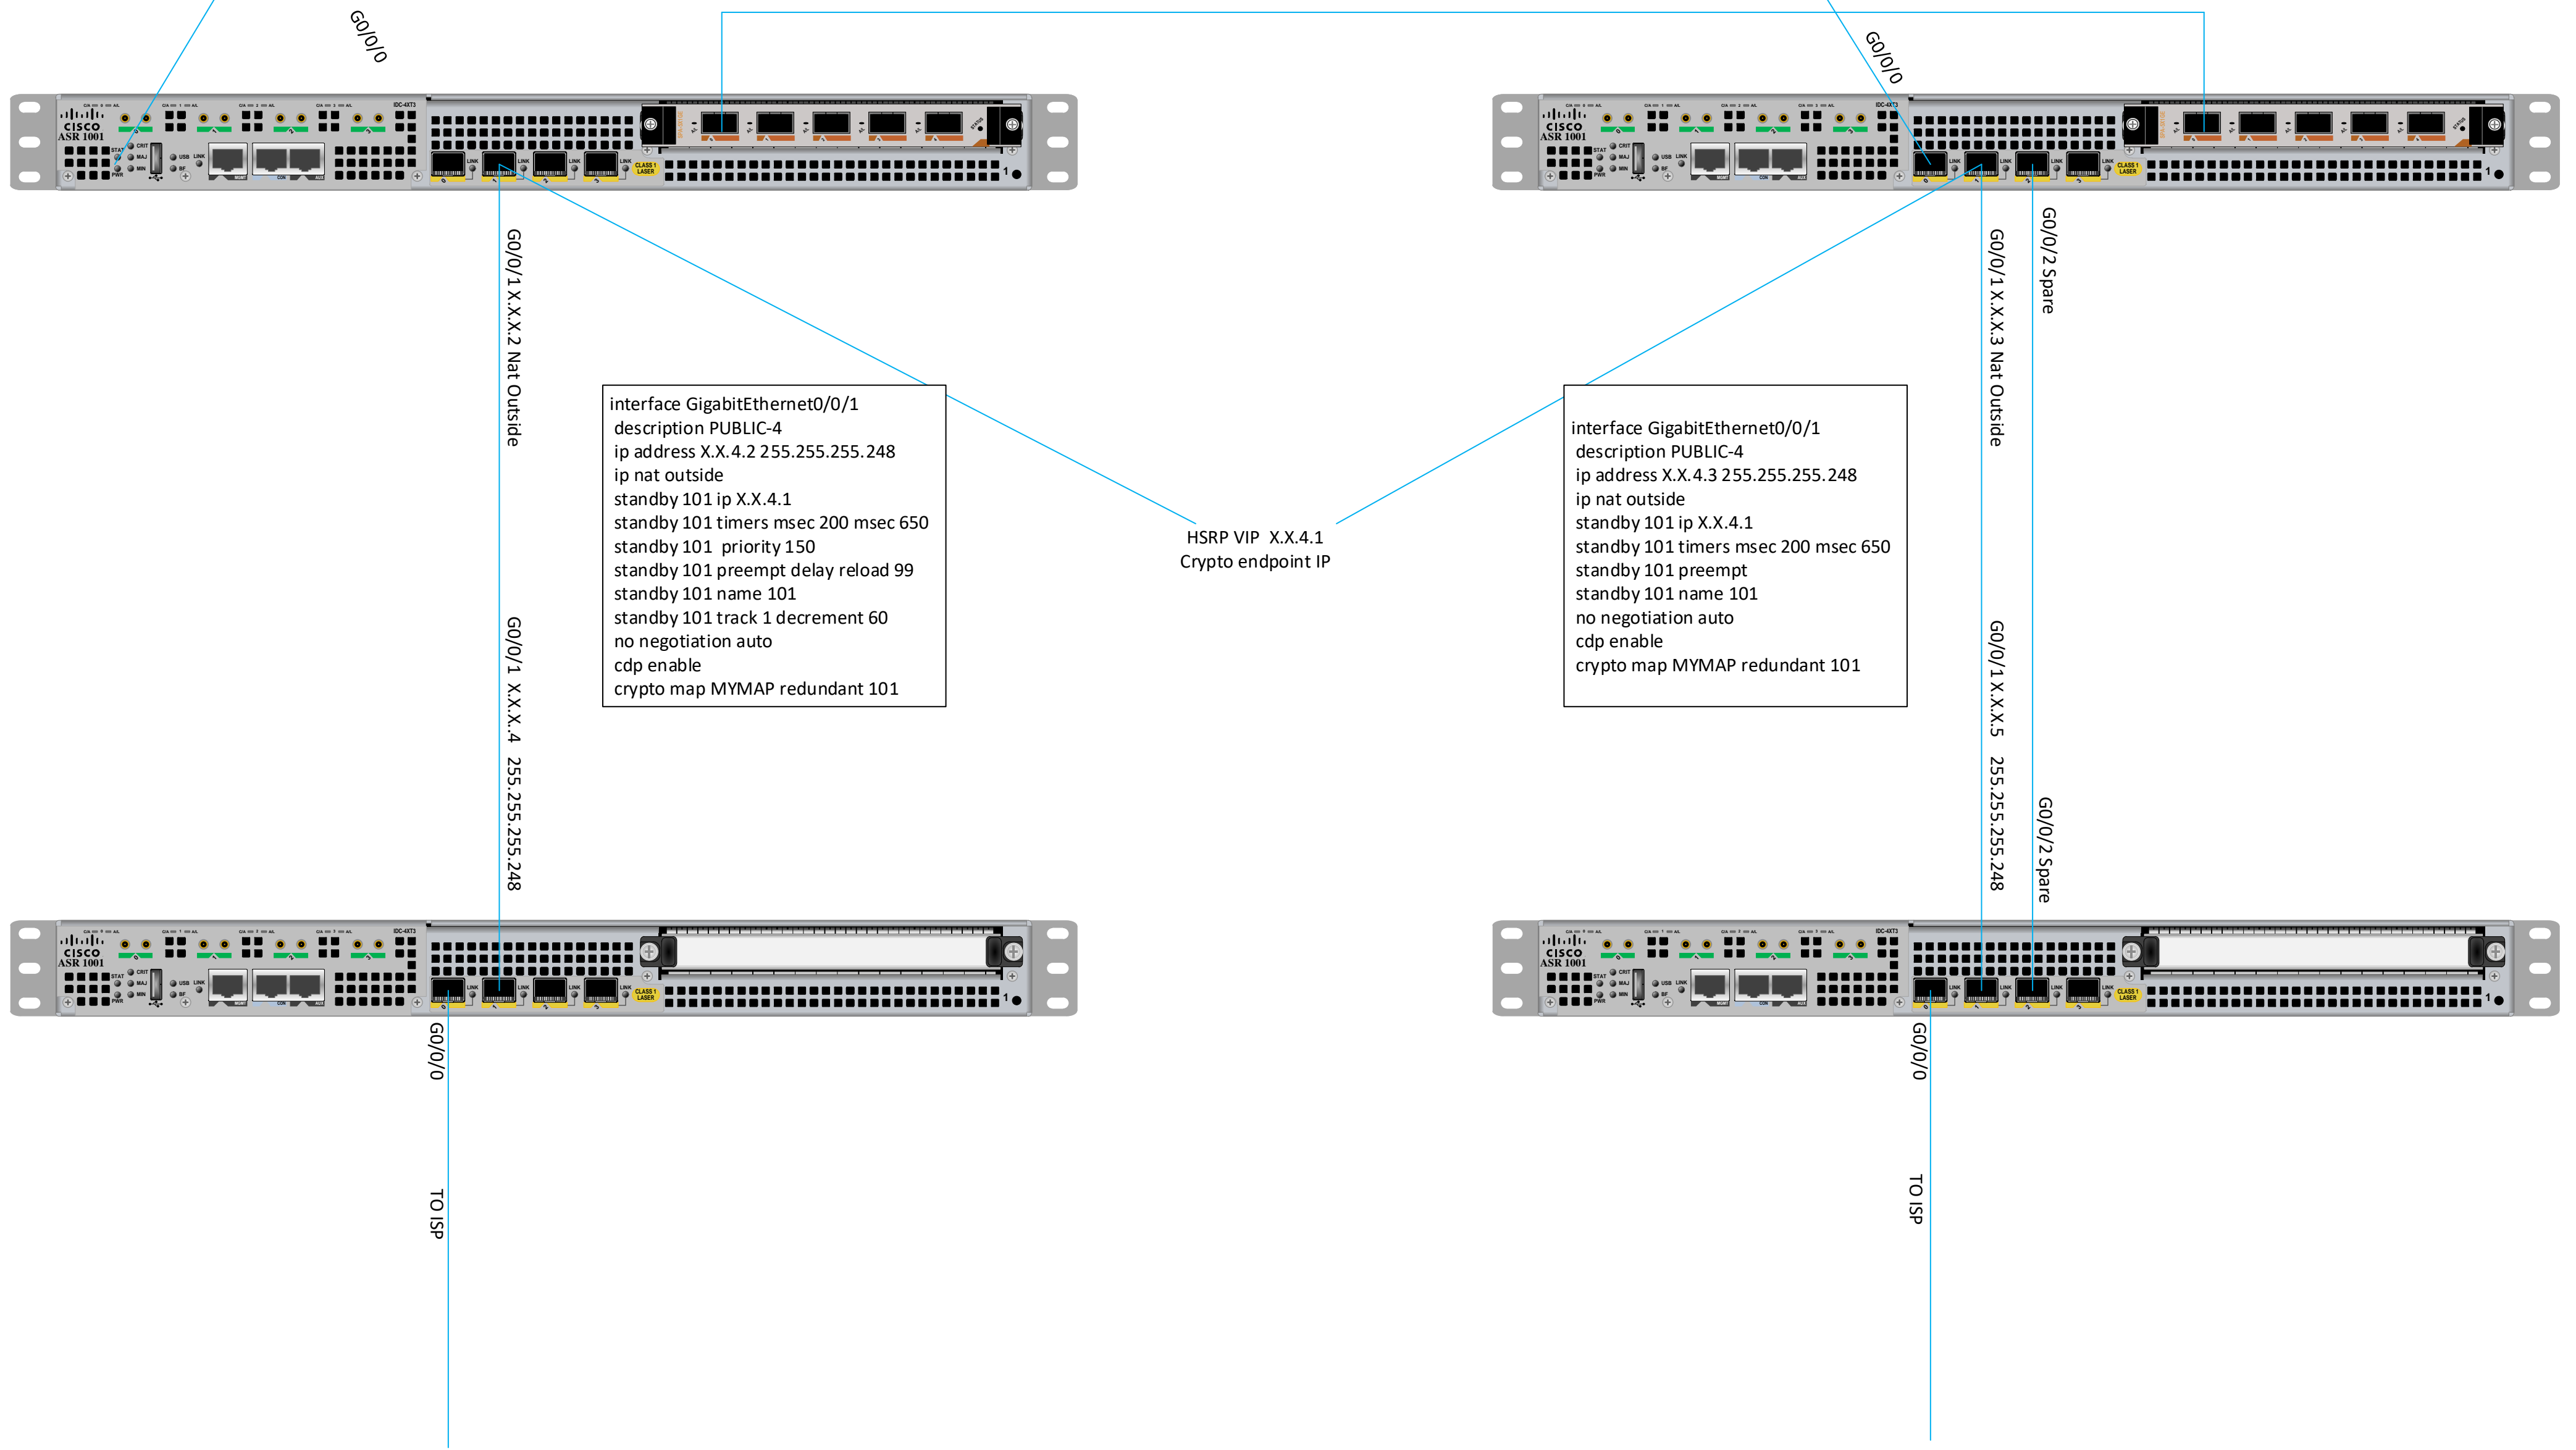

```
interface GigabitEthernet0/0/1
description PUBLIC-4
ip address X.X.4.2 255.255.255.248
ip nat outside
standby 101 ip X.X.4.1
standby 101 timers msec 200 msec 650
standby 101 priority 150
standby 101 preempt delay reload 99
standby 101 name 101
standby 101 track 1 decrement 60
no negotiation auto
cdp enable
crypto map MYMAP redundant 101
```

```
interface GigabitEthernet0/0/1
description PUBLIC-4
ip address X.X.4.3 255.255.255.248
ip nat outside
standby 101 ip X.X.4.1
standby 101 timers msec 200 msec 650
standby 101 preempt
standby 101 name 101
no negotiation auto
cdp enable
crypto map MYMAP redundant 101
```

HSRP VIP X.X.4.1
Crypto endpoint IP