



Radius isn't straight forward on UCS. If you are using Windows IAS you must do the following. FYI...

First, you have to have the individual Fabric Interconnect IPs set as the client, not the shared IP for management that you actually log into.

Next, only PAP authentication selected.

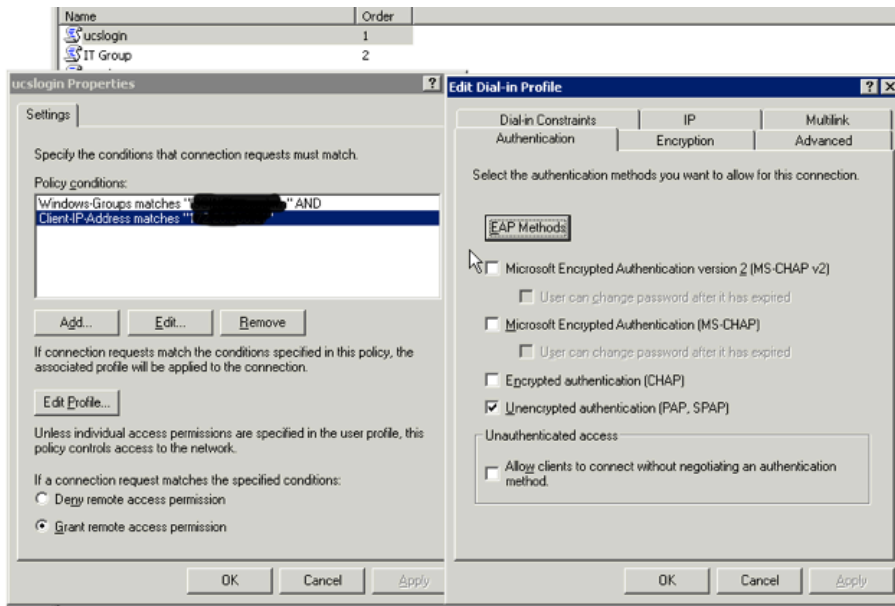

Then, you have to have the RADIUS standard VSA

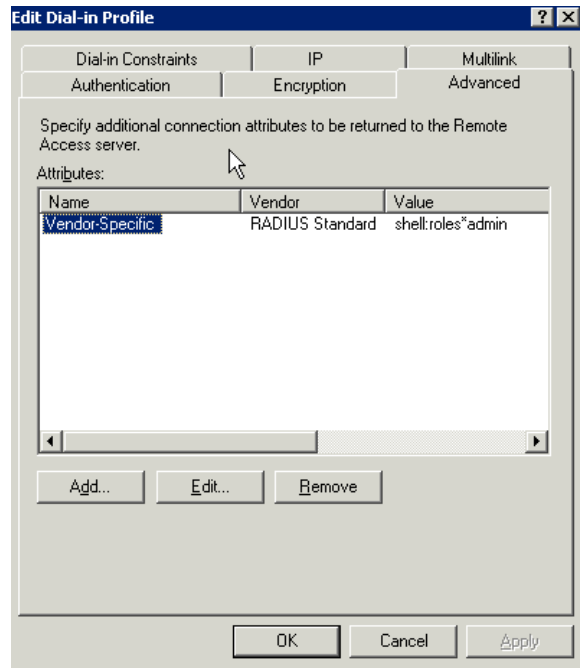

BUT, once you select that VSA, you have to set the vendor ID to Cisco and the attribute number to 1.

Multivalued Attribute Information

Vendor-Specific Attribute Information

Attribute name:
Vendor-Specific

Specify network access server vendor.

Select from list: Cisco

Enter Vendor Code:

Specify whether the attribute conforms to the RADIUS RFC specification for vendor specific attributes.

Yes. It conforms.

No. It does not conform.

Configure Attribute...

OK Cancel

Configure VSA (RFC compliant)

Vendor-assigned attribute number:
1

Attribute format:
String

Attribute value:
shell:roles-admin

OK Cancel