


ASA 5505 V.5.2 Basic
License

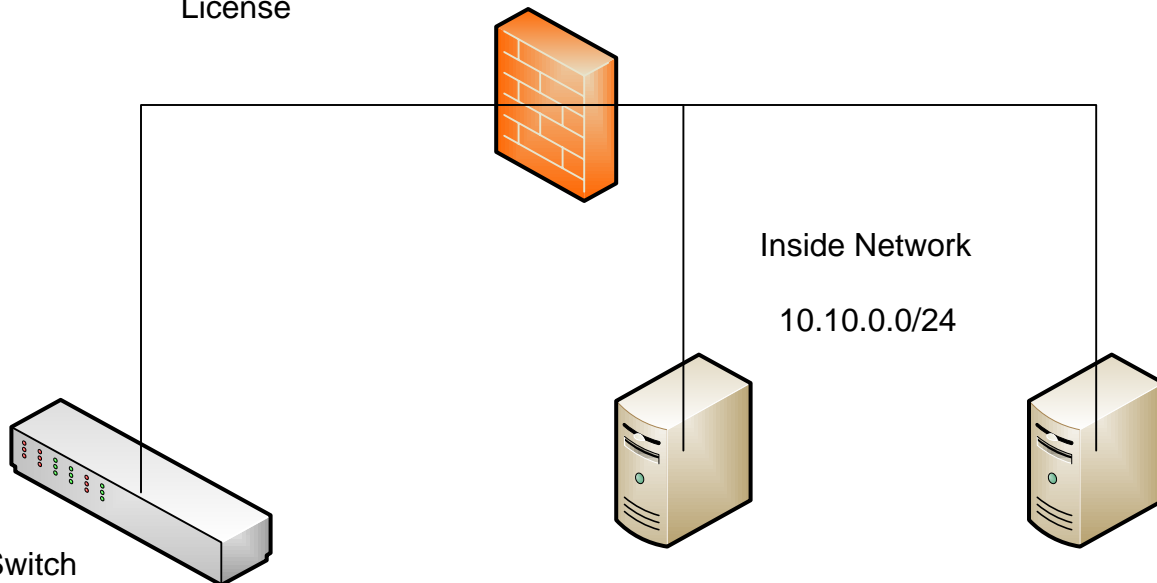

HP 2920 Layer 3 Switch
10.10.0.1

Switch is configured for
Vlans including:
10.10.30.0
10.10.40.0
10.10.50.0

Inside Network
10.10.0.0/24

Question is how do I configure the ASA firewall to allow the Vlans
on the switch to access the Internet AND allow the internal network
to access the Vlans?

With a Basic License, I only have an inside and an outside interface.