



Scenario #1

Two separate 4500-x distribution switches, each with port-channel to Core which is in VSS. Access Stack connected to Aggregation switches with two uplinks. One uplink forwarding, another uplink blocking

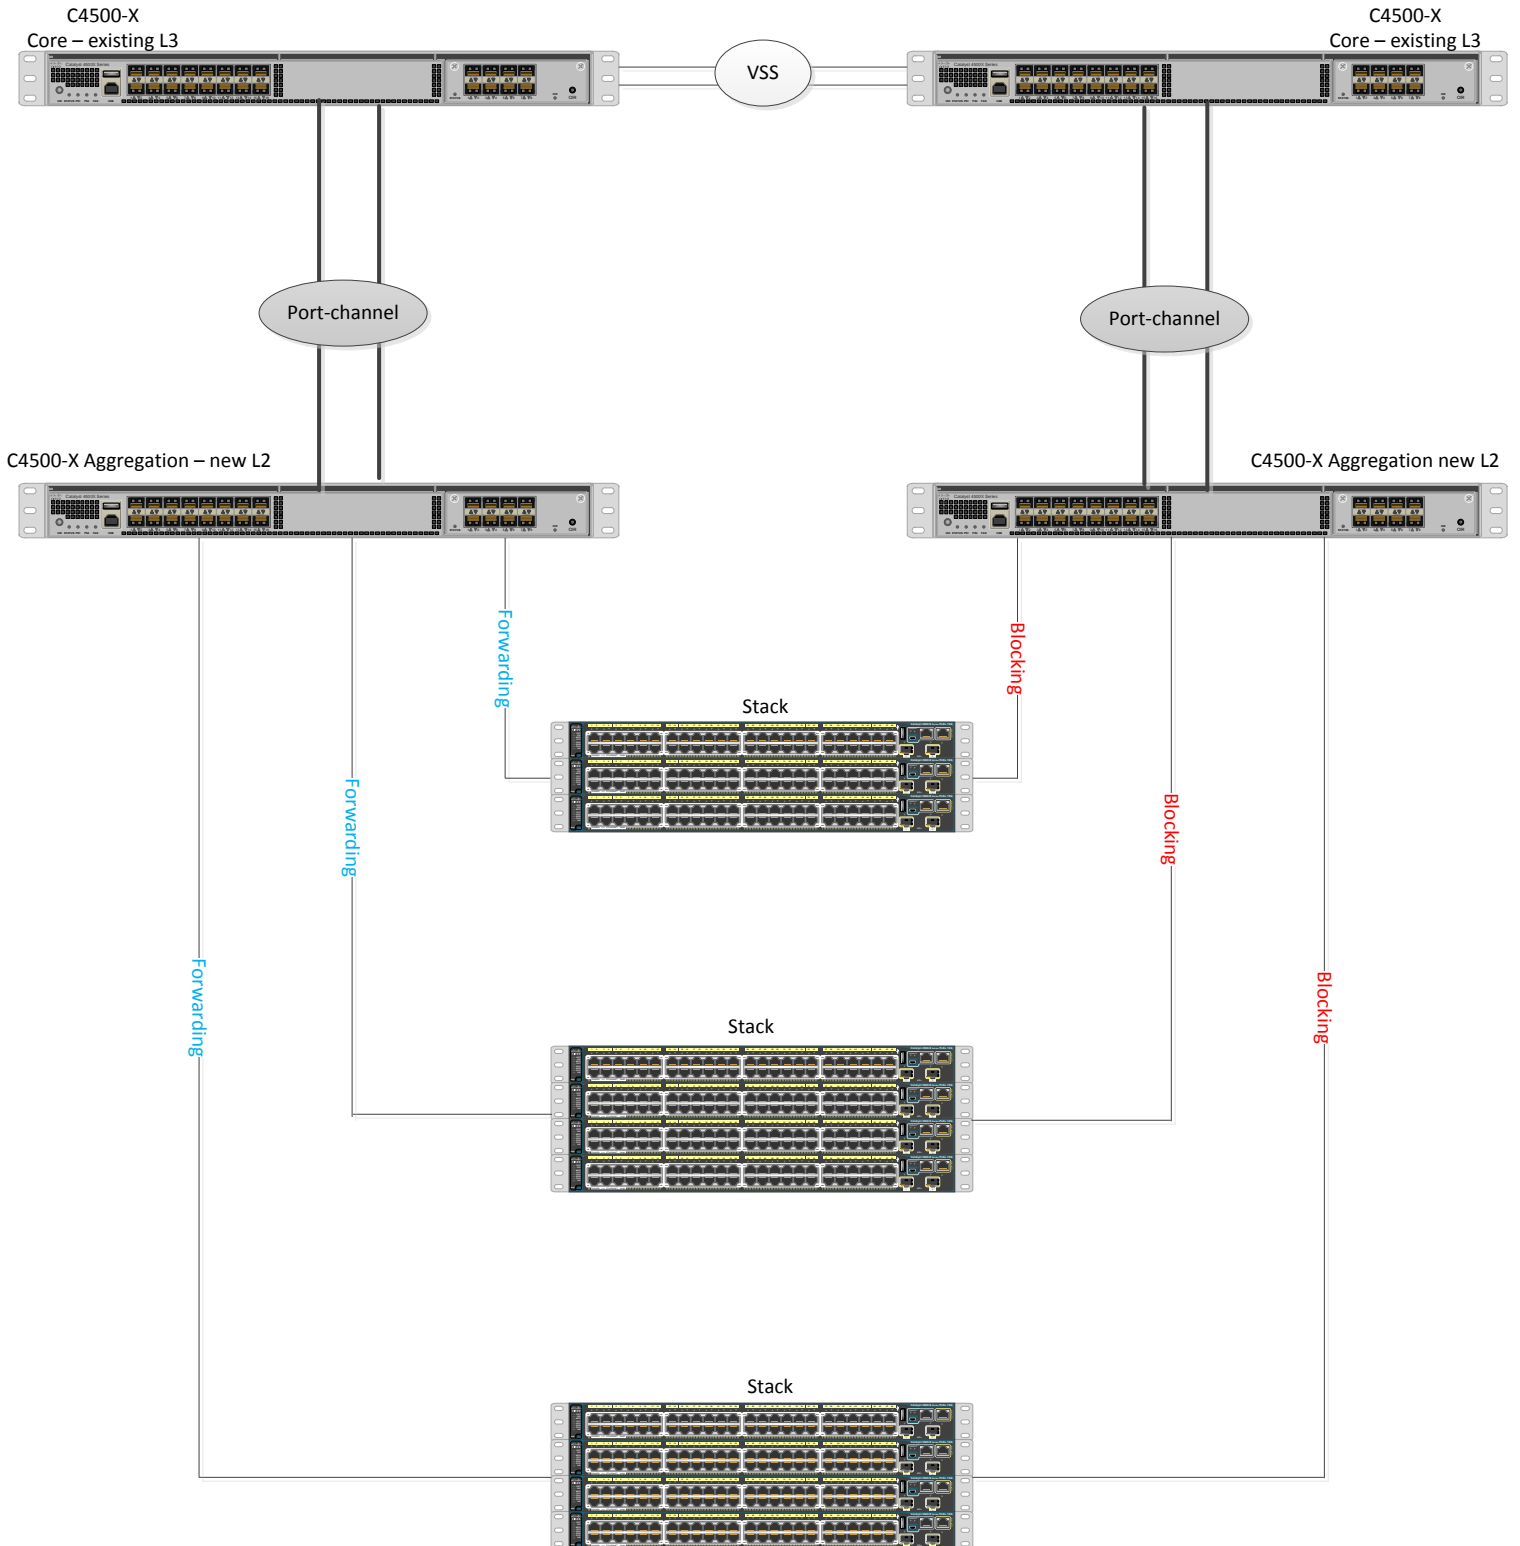

Scenario #2

Two separate 4500-X L2 switches as aggregation only. Each 4500-X aggregation switch has a Port-channel to 4500-X Core which is in VSS

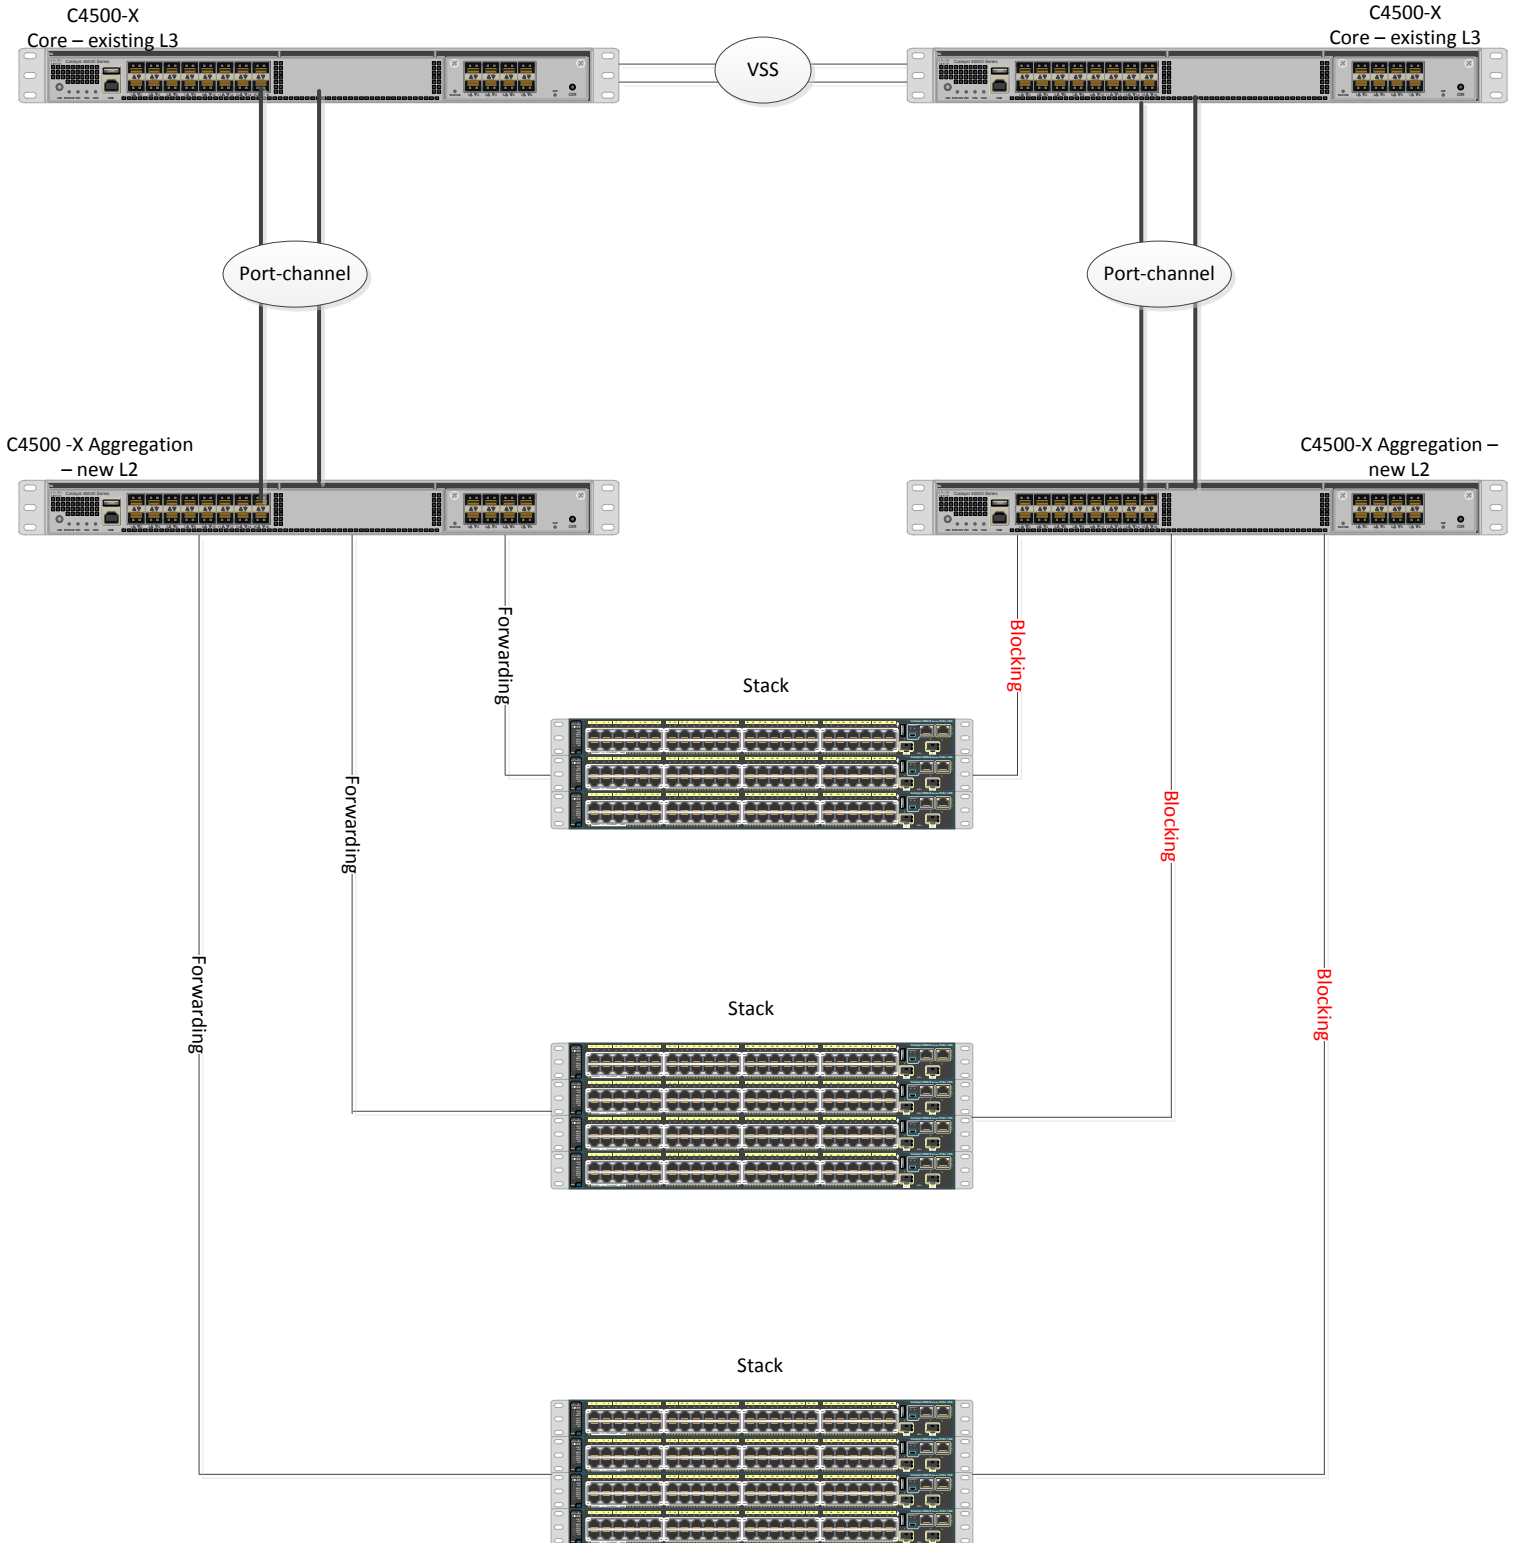

Scenario #3

Two 4500-X aggregation switches in VSS with multiport Port-channel to existing 4500-X Core which is in VSS already.
All access Stacks connected to 4500-X aggregation switch with port-channels

