


setup

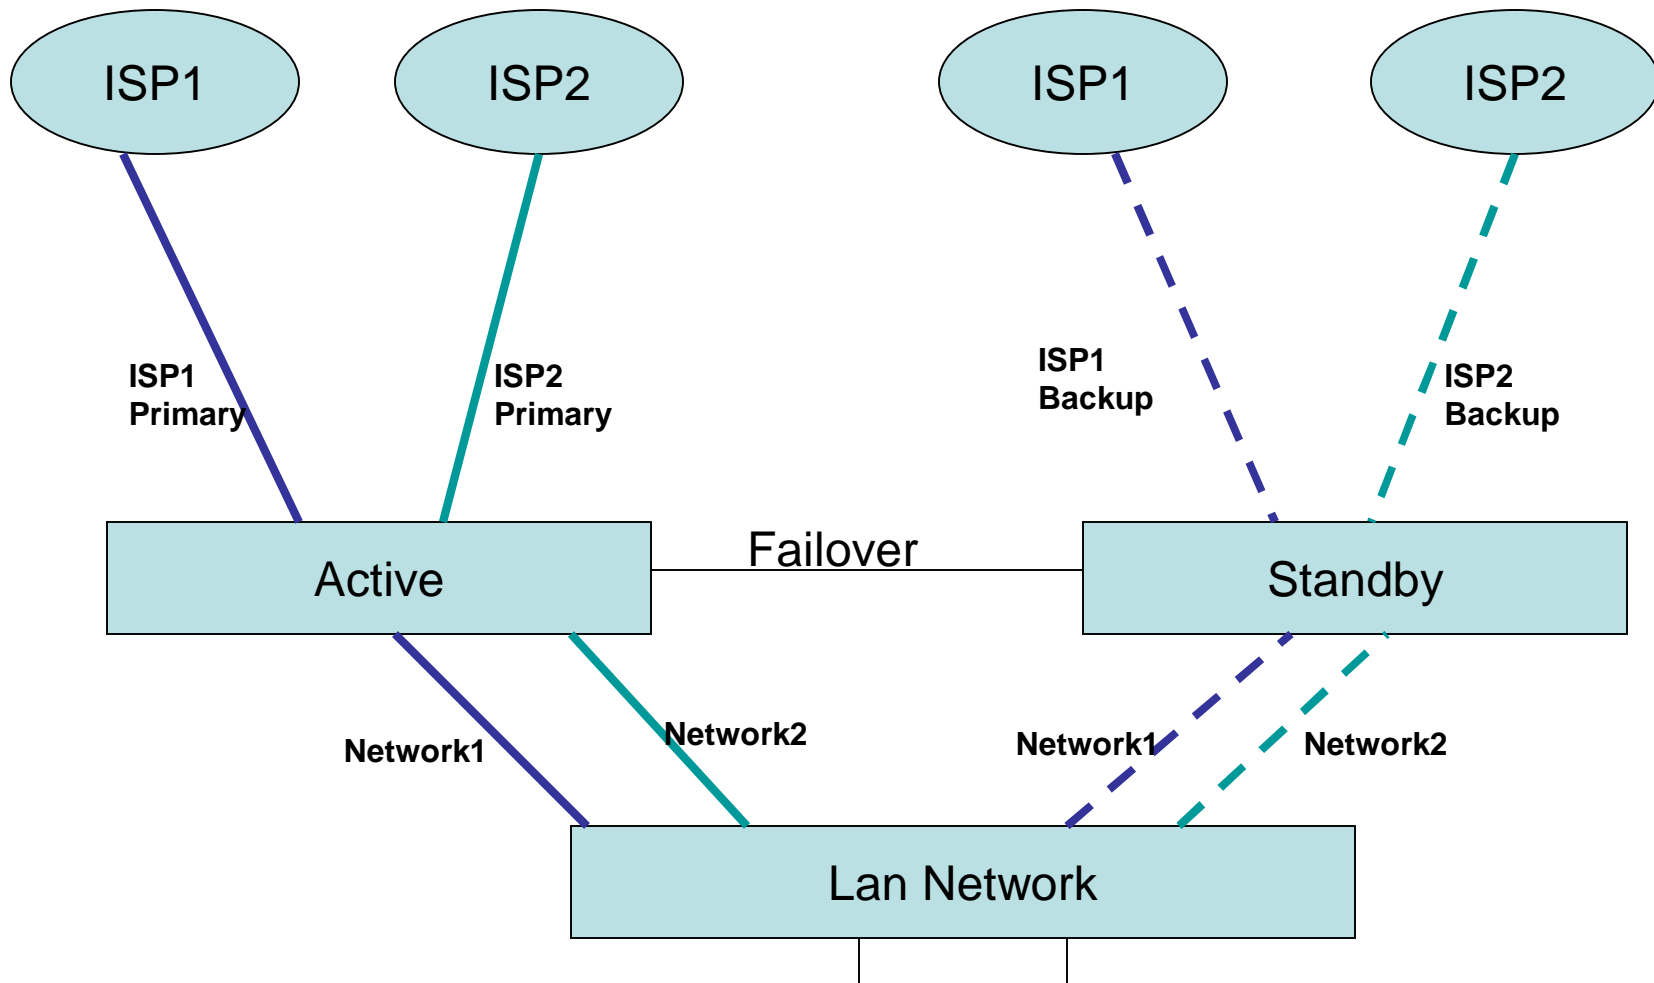

Network 1 uses ISP1 Primary link during normal operation and ISP1 Backup link during failover
Network 2 uses ISP2 Primary link during normal operation and ISP2 Backup link during failover