

Telekom Company Flex / DE

Mittwoch, 5. August 2020 14:24

SIP Trunk Details


Can be viewed, when the SIP Trunk was added in the Telekom CompanyFlex portal by the customer / engineer (Normally not done by Telekom).

Rufnummer	e.g. +49763112345 [5-9]*
Registration Number	e.g. +4919929600000012345
Username	<Registration Number>@tel.t-online.de e.g. +4919929600000012345@tel.t-online.de
Passwort	<Customer-Password>
SIP-Registrar / Proxy	5511<CustomerID>.primary.companyflex.de 5511<CustomerID>.secondary.companyflex.de e.g. 551136123456.primary.companyflex.de
Port	5060 / TCP
SIP-Domain	tel.t-online.de
DNS-Server	For Internet acces with fixed public IP range (DCIP): 194.25.0.60 --> Leipzig 194.25.0.68 --> Frankfurt 194.25.0.52 --> Hannover When using DSL: Will be assigned dynamically

Telekom Portal Configuration

The portal provides an overview of the booked sessions, the number ranges assigned to CompanyFlex and the SIP trunks.

Herzlich willkommen



CompanyFlex

Das flexible Anschlusskonzept für Ihre gesamte Unternehmenskommunikation

Alles Wissenswerte für die Ersteinrichtung

Alles Wissenswerte für die Ersteinrichtung finden Sie direkt im [Hilfe-Portal](#).
Tipp: Kontextbezogene Hilfe und Beschreibungen finden Sie generell unter [?](#)

Neueinsteiger-Themen in Zukunft nicht mehr anzeigen

Bestand

- Gebuchte Parallele Gespräche Anzahl: 30
- Übersicht der Rufnummern Ihrer Standortverträge (nicht zugewiesene Rufnummern) ▼
- Angelegte SIP-Trunks (zugewiesene Rufnummern) ▼

If there are still phone numbers available, they will be displayed in the section "**Übersicht der Rufnummern Ihrer Standortverträge**": (in this example, all numbers were already assigned, therefore none are displayed)

Übersicht der Rufnummern Ihrer Standortverträge (nicht zugewiesene Rufnummern) ▲

Hinweis: Ihnen stehen zur Zeit keine freien Rufnummern zur Verfügung.
Um wieder freie Rufnummern zuordnen zu können, müssen Sie entweder im Bereich der zugewiesenen Rufnummern unter "Bearbeiten" Rufnummern freigeben oder neue Rufnummern über einen Standortvertrag beim Kundenservice beauftragen.

In "Angelegte SIP-Trunks (zugewiesene Rufnummern)" new SIP-Trunks can be added / modified, gives an overview of the already existing SIP Trunks:

Angelegte SIP-Trunks (zugewiesene Rufnummern) ▲

Hier finden Sie eine Übersicht Ihrer zugewiesenen Rufnummern zu den entsprechenden SIP-Trunks. Sie haben die Möglichkeit, nach dem Namen des SIP-Trunks oder einer Rufnummer zu suchen.

SIP-Trunk Übersicht (1) SIP-Trunk anlegen

Suche: i

Name	Zugewiesene Rufnummern	
▼ SIP Trunk Name	+49 7631 [redacted]*, +49 7631 [redacted]*, +49 7631 [redacted]*, +49 7631 [redacted]*, +49 7631 [redacted]	Bearbeiten ▼

!!! Attention !!!:

New SIP Trunks can only be added, if there are any free phone numbers.

Beim Dropdown "Bearbeiten" neben einem SIP-Trunk, kann man sich unter "Details/Konfigurieren", die gebuchten Optionen (Clip-No-Screening, Call-Routing), die SIP-Registrierungsdaten, den SIP-Trunk-Status und zugeordneten Rufnummern anzeigen lassen:

In the "Bearbeiten" dropdown next to a SIP trunk, under "Details/Konfigurieren" you can view the booked options (clip no screening, call routing), the SIP registration data, the SIP trunk status and assigned phone numbers:

Angelegte SIP-Trunks (zugewiesene Rufnummern) ▲

Hier finden Sie eine Übersicht Ihrer zugewiesenen Rufnummern zu den entsprechenden SIP-Trunks. Sie haben die Möglichkeit, nach dem Namen des SIP-Trunks oder einer Rufnummer zu suchen.

SIP-Trunk Übersicht (1) SIP-Trunk anlegen

Suche: i

Name	Zugewiesene Rufnummern	
▼ SIP Trunk Name	+49 7631 [redacted]*, +49 7631 [redacted]*, +49 7631 [redacted]*, +49 7631 [redacted]*, +49 7631 [redacted]	Bearbeiten ▼ - Details/Konfigurieren Rufnummern bearbeiten Löschen

Funktionen

SIP-Trunk Übersicht

Name SIP-Trunk Name: ██████████	Telefonie-Anmeldedaten SIP-Domain: tel.t-online.de Outbound-Proxy: 5511 ██████████ primary.companyflex.de 5511 ██████████ secondary.companyflex.de Registrar: tel.t-online.de Registrierungsrufnummer: +49199296 ██████████ Telefonie-Benutzername: +49199296 ██████████@tel.t-online.de Telefonie-Passwort: ██████████ Neues Passwort generieren
Kontakt Administrator: ██████████ E-Mail-Adresse: ██████████ Rufnummer: ██████████	Internet-Zugangsdaten Zur Generierung von neuen Internet-Zugangsdaten wechseln Sie bitte ins Business Service Portal. Mehr Informationen zu dem Thema finden Sie in der Direkthilfe .
Gebuchte Zusatz-Pakete	

Status Online [Status aktualisieren](#)

Ablaufzeitpunkt der Registrierung: 10.12.2020 11:54:23
IP-Adresse der Registrierung: 62.153. ██████████
Telefonanlage & Firmware: SIP_Profil_0/Cisco-SIPGateway/ ██████████
Zugangsnummer des Anschlusses (bei Telekom Anschluss): I2bsa

CUBE Configuration

```
ip name-server 194.25.0.60 194.25.0.52 194.25.0.68
!
voice call send-alert
no voice call carrier capacity active
voice rtp send-recv
!
voice service voip
ip address trusted list
ipv4 [CUCM PUB] 255.255.255.255
ipv4 [CUCM SUB] 255.255.255.255
ipv4 217.0.0.0 255.255.224.0
ipv4 217.0.128.0 255.255.240.0
rtp-port range 16384 32766
address-hiding
mode border-element license capacity [SESSION COUNT]
media statistics
media bulk-stats
media disable-detailed-stats
media stats-disconnect
allow-connections sip to sip
no supplementary-service sip handle-replaces
fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback pass-through g711alaw
h323
call service stop
sip
min-se 900 session-expires 1800
no update-callerid
sip-profiles inbound
audio forced
!
voice class uri CUCMIN1000 sip
host ipv4:[CUCM PUB]
host ipv4:[CUCM SUB]
!
voice class codec 1
codec preference 1 g711alaw
codec preference 2 g722-64
```

```

!
!
voice class sip-profiles 2000
rule 1 request INVITE sip-header P-Asserted-Identity remove
!
voice class sip-profiles 2001
rule 1 request ANY sip-header Contact modify "< sip:(.*)@" "< sip:+49199296000000012345@"
rule 2 response ANY sip-header Contact modify "< sip:(.*)@" "< sip:+49199296000000012345@"
rule 3 request ANY sip-header Session-ID remove
rule 4 response ANY sip-header Session-ID remove
rule 5 request BYE sip-header P-Preferred-Identity remove
rule 6 request ANY sip-header User-Agent remove (optional)
rule 7 response ANY sip-header User-Agent remove (optional)
rule 8 request ANY sip-header Cisco-Guid remove (optional)
rule 9 response ANY sip-header Cisco-Guid remove (optional)
!
voice class sip-profiles 2051
rule 1 request INVITE peer-header sip P-Preferred-Identity copy "sip:(.*)@" u01
rule 2 request INVITE peer-header sip Diversion copy "sip:(.*)@" u01
rule 3 request INVITE sip-header P-Preferred-Identity modify "< sip:.*@(.*)>" "< sip:\u01@tel.t-online.de>"
rule 4 request INVITE sip-header P-Early-Media add "P-Early-Media: supported"
rule 5 request ANY sip-header Contact modify "< sip:(.*)@" "< sip:+49199296000000012345@"
rule 6 response ANY sip-header Contact modify "< sip:(.*)@" "< sip:+49199296000000012345@"
rule 7 request ANY sip-header Session-ID remove
rule 8 response ANY sip-header Session-ID remove
rule 9 request BYE sip-header P-Preferred-Identity remove
rule 10 request ANY sip-header Diversion remove
rule 11 request INVITE sip-header Expires remove
rule 12 request ANY sip-header User-Agent remove (optional)
rule 13 response ANY sip-header User-Agent remove (optional)
rule 14 request ANY sip-header Cisco-Guid remove (optional)
rule 15 response ANY sip-header Cisco-Guid remove (optional)
!
!
voice class sip-copylist 1000
sip-header P-Preferred-Identity
sip-header Diversion
!
voice class e164-pattern-map 1050
e164 +49763112345[5-9]T
!
!
voice class e164-pattern-map 2050
e164 010T
e164 116...
e164 118..
e164 11[025]
e164 +T
!
!
voice class dpg 1001
dial-peer 2051
!
voice class dpg 2001
dial-peer 1051
!
voice class server-group 1000
ipv4 [CUCM PUB] preference 3
ipv4 [CUCM SUB] preference 2
description ### CUCM Server Group ###
!
voice class sip-options-keepalive 1000
up-interval 30
retry 3
transport tcp
!
voice class tenant 1000
no remote-party-id
session transport tcp
no session refresh
header-passing
error-passthru
bind control source-interface [LAN Interface]
bind media source-interface [LAN Interface]
no pass-thru content custom-sdp

```

```

privacy-policy passthru
!
voice class tenant 2000
registrar dns:tel.t-online.de expires 480 tcp
credentials number +4919929600000012345 username +4919929600000012345@tel.t-online.de password 0 <Customer-Password> realm tel.t-online.de
authentication username +4919929600000012345@tel.t-online.de password 0 <Customer-Password> realm tel.t-online.de
no remote-party-id
timers dns registrar-cache ttl
sip-server dns:tel.t-online.de
session transport tcp
no session refresh
header-passing
error-passthru
asserted-id ppi
bind control source-interface [WAN Interface]
bind media source-interface [WAN Interface]
no pass-thru content custom-sdp
conn-reuse
outbound-proxy dns:551136123456.primary.companyflex.de
privacy-policy passthru
!
dial-peer voice 1001 voip
description ### From CUCM ###
session protocol sipv2
destination dpg 1001
incoming uri via CUCMIN1000
voice-class codec 1
voice-class sip tenant 1000
voice-class sip copy-list 1000
dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
no vad
!
dial-peer voice 1051 voip
description ### To CUCM ###
huntstop
session protocol sipv2
session server-group 1000
destination e164-pattern-map 1050
voice-class codec 1
voice-class sip early-offer forced
voice-class sip tenant 1000
voice-class sip options-keepalive profile 1000
dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
no vad
!
dial-peer voice 2001 voip
description ### From SIP-SP Telekom CompanyFlex ###
session protocol sipv2
destination dpg 2001
incoming called e164-pattern-map 1050
voice-class codec 1
voice-class sip profiles 2001
voice-class sip profiles 2000 inbound
voice-class sip tenant 2000
dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
ip qos dscp cs6 signaling
no vad
!
dial-peer voice 2051 voip
description ### To SIP-SP Telekom CompanyFlex ###
huntstop
session protocol sipv2
session target sip-server
destination e164-pattern-map 2050
voice-class codec 1
voice-class sip early-offer forced
voice-class sip profiles 2051
voice-class sip tenant 2000
voice-class sip options-keepalive profile 1000

```

```

dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
ip qos dscp cs6 signaling
clid strip name
no vad
!
sip-ua
timers connection aging 10
no transport udp

```

Access list for WAN-Interface

```

ip access-list extended FROM-DT-TO-CUBE
remark ### Permitted ISP Public address Range ###
permit udp 217.0.0.0 0.0.31.255 range 1025 65534 any
permit udp 217.0.128.0 0.0.15.255 range 1025 65534 any
permit tcp 217.0.0.0 0.0.31.255 any eq 5060
permit tcp 217.0.128.0 0.0.15.255 any eq 5060
permit tcp any any established
remark ### Deutsch Telekom DNS ###
permit udp host 194.25.0.60 eq domain any
permit udp host 194.25.0.52 eq domain any
permit udp host 194.25.0.68 eq domain any
remark ### Permitted PING from inside to outside ###
permit icmp 217.0.0.0 0.0.31.255 any
permit icmp 217.0.128.0 0.0.15.255 any
permit icmp any any echo-reply
remark ### Deny all Other traffic ###
deny ip any any
!
interface [WAN Interface]
ip access-group FROM-DT-TO-CUBE in
!

```

Sources

-



1tr119



DT-Compan
y-Flex-Cis...

Troubleshooting

- Problem with Call Forward to mobile networks:
https://hilfe.companyflex.de/de/grundlagen/bekannt-einschraenkungen?mode=user#_187442

Lösung:

Send 181 Call Is Being Forwarded *	True	False
Delay Sending 181 until 180/183 message is received *	False	True

CUCM Konfiguration

Mittwoch, 3. März 2021 11:18

Service Parameter:

Im CCM-Service: Duplex Streaming Enabled: True

Default User Hold MOH Audio Source ID *	1
Duplex Streaming Enabled *	True
Media Exchange Interface Capability Timer *	8
Send Multiple MOH to User SIP Message *	

SIP Profile:

- Early Offer Support for Voice and Video Calls: Best Effort (No MTP inserted)
- Enable External Presentation Name and Number: On
- SIP Options Ping: On (optional)
- SDP Information:
 - Send Send-receive SDP in mid-Call Invite: On
 - Allow multiple codecs in answer SDP: On

SIP Session Options	Deaktiviert
Video Call Traffic Class*	Gemischt
Calling Line Identification Presentation*	Standard
Session Refresh Method*	Einladen
Early Offer support for voice and video calls*	Beste Leistung (kein MTP eingefügt)
<input type="checkbox"/> Enable ANAT	
<input type="checkbox"/> Deliver Conference Bridge Identifier	
<input checked="" type="checkbox"/> Enable External Presentation Name and Number	
<input type="checkbox"/> Reject Anonymous Incoming Calls	
<input type="checkbox"/> Reject Anonymous Outgoing Calls	
<input type="checkbox"/> Send ILS Learned Destination Route String	
<input type="checkbox"/> Connect Inbound Call before Playing Queuing Announcement	
SIP OPTIONS Ping	
<input checked="" type="checkbox"/> Enable OPTIONS Ping to monitor destination status for Trunks with Service Type "None (Default)"	
Ping Interval for In-service and Partially In-service Trunks (seconds)*	60
Ping Interval for Out-of-service Trunks (seconds)*	120
Ping Retry Timer (milliseconds)*	500
Ping Retry Count*	6
SDP Information	
<input checked="" type="checkbox"/> Send send-receive SDP in mid-call INVITE	
<input type="checkbox"/> Allow Presentation Sharing using BFCP	
<input type="checkbox"/> Allow iX Application Media	
<input checked="" type="checkbox"/> Allow multiple codecs in answer SDP	

SIP Trunk

- PSTN Access
- Run on all active Unified CM Nodes
- Remote Party id: OFF
- Asserted-Identity: ON
 - Asserted-Type: PPI
- Redirect Diversion Header Delivery - Outbound
 - SIP Trunk Security Profile: von oben erstellte verwenden
 - SIP Profile: von oben erstellte verwenden

- PSTN Access
- Run On All Active Unified CM Nodes

Intercompany Media Engine (IME)

E.164 Transformation Profile < None >

MLPP and Confidential Access Level Information

MLPP Domain < None >
 Confidential Access Mode < None >
 Confidential Access Level < None >

Call Routing Information

- Remote-Party-Id
 - Asserted-Identity
- Asserted-Type* PPI
 SIP Privacy* Standard
 Trust Received Identity* Allen vertrauen (Standard)

Inbound Calls

Significant Digits* All
 Connected Line ID Presentation* Default
 Connected Name Presentation* Default
 Calling Search Space CSS_Intern
 AAR Calling Search Space < None >
 Prefix DN

- Use Device Pool Calling Party Transformation CSS
- Calling Party Selection* Originator
 Calling Line ID Presentation* Default
 Calling Name Presentation* Default
 Calling and Connected Party Info Format* VN nur für verbundenen Teilnehmer übermitteln

- Redirecting Diversion Header Delivery - Outbound
- Redirecting Party Transformation CSS CSS_CUBE_Muellheim_xlate_calling_out

- Use Device Pool Redirecting Party Transformation CSS
- Use original calling line's Calling Line ID Presentation for diverted calls

Presentation Information

- Anonymous Presentation
- Presentation Number
 Presentation Name
- Send Presentation Name and Number only in the FROM header and not in the other identity headers

SIP Information

Destination

- Destination Address is an SRV
- | | Destination Address | Destination Address IPv6 | Destination Port |
|----|---------------------|--------------------------|------------------|
| 1* | 10.3.192.2 | | 5060 |

MTP Preferred Originating Codec* 711alaw
 BLF Presence Group* Standard Presence group
 SIP Trunk Security Profile* CUBE Muellheim SIP Trunk Profile
 Rerouting Calling Search Space < None >
 Out-Of-Dialog Refer Calling Search Space < None >
 SUBSCRIBE Calling Search Space < None >
 SIP Profile* CUBE Muellheim SIP Profile [View Details](#)

CUC Konfiguration

Donnerstag, 14. Januar 2021 09:48


Telephony Integrations:

--> Check Port Group, if in "G.711a-law" is select in "Codec Advertising"

Edit Codec Advertising

Port Group Edit Refresh Help

Status

 One or more port groups need to be reset.

Audio Codec Advertising

Advertised Codecs
G.711 mu-law
G.729

Unadvertised Codecs
G.722
iLBC

Video Quality Parameters

Video Codec
Video Resolution

Fields marked with an asterisk (*) are required.

Technical Specification of the SIP- Trunking Interface for CompanyFlex of Deutsche Telekom

1TR119

Version 1.6.0

30. April 2020



Herausgeber / Publisher

Deutsche Telekom AG

Verantwortlich/ Responsible

Deutsche Telekom Technik GmbH

Services & Platforms, Voice & Messaging

Abteilung Design&Automation

53227 Bonn

Bestellangabe / Order Information

Kurztitel / Title: 1TR119

Ausgabe / Version: Version 1.6.0

Bezugsanschrift / Order address

Deutsche Telekom Technik GmbH

Services & Platforms, Voice & Messaging

Abteilung Design&Automation

53227 Bonn

Kopie und Vervielfältigung verboten / Copying and duplication prohibited

Gültig ist immer die aktuelle Bildschirmausgabe des Deutschen Telekom-Servers /
Only the current release on the Deutsche Telekom server is valid

© 2019 Deutsche Telekom Technik GmbH Design&Automation All Rights Reserved

Change History

Version	Date	Editor	Changes / Commentary
1.0	02.04.2019	Walid Jerbi	First Official Version
1.1	28.06.2019	Walid Jerbi	Changes in 5.1, 10.2, 10.3, 11.1, 12.2, 13.3, 13.4, 13.5, 13.6
1.2	18.07.2019	Walid Jerbi	new Root Certificate
1.3	14.08.2019	Michael Kreipl	Editorial changes, updates for pTime in chapter 6.1
1.4	30.10.2019	Michael Kreipl	Updates for maxpTime and Codec Lockdown, SIP 403 and 488 for PPI and PAI, Outbound Proxy and SIP Options
1.5	22.11.2019	Michael Kreipl	Amendment for Call Forwarding in chapter 13.5 and media supervision in chapter 13.10 and inclusion of clause 12.3 and 9.5
1.5.1	04.12.2019	Michael Kreipl	Editorial Update of Product Name
1.6.0	30.04.2020	Michael Kreipl	Update of the Example in Chapter 5.1, Amendment in Chapter 8.1.1, Update in Chapter 9.1

Contents

1	Scope.....	5
2	References.....	6
3	Definitions.....	7
4	General Description	8
4.1	Identities configured for the SIP-PBX and Addressing.....	8
5	Mode of Operation.....	8
5.1	Registration mode	8
5.2	Static mode.....	10
6	Codecs.....	10
6.1	Telephony Codecs.....	10
6.2	Fax.....	10
6.3	Video.....	10
7	Outbound Proxy Selection	10
8	Redundancy and Failover.....	11
8.1	SIP N-way Redundancy	12
8.1.1	Trunk Capacity Management.....	12
9	IP and Transport.....	13
9.1	IP-addresses	13
9.2	IPv6.....	13
9.3	Transport Protocols	13
9.4	NAT-Traversal	13
9.5	TCP Connection Re-Use	13
10	Signalling and media security	14
10.1	SIP security	14
10.2	Deutsche Telekom Certificate download	14
10.3	Media Encryption.....	14
10.4	NTP.....	15
11	Emergency Calls and Special Numbers	15

11.1	Emergency Calls from a SIP-PBX to the NGN.....	15
11.2	Special numbers	16
11.3	DTMF	16
11.4	Early Media Support	16
12	Basic Call	17
12.1	Incoming Calls from the Service Provider to SIP-PBX	17
12.2	Outgoing calls from SIP-PBX to the service provider	18
12.3	Sending of non-100-Responses	18
13	Supported Services.....	18
13.1	CLIP/CLIR (OIP/OIR).....	18
13.2	COLP/COLR (TIP/TIR).....	19
13.3	CLIP no Screening	19
13.4	Call Forwarding by Deflection (302).....	19
13.5	Call Forwarding by New INVITE.....	19
13.6	Call Transfer	20
13.7	Call by Call	20
13.8	Advice of Charge	20
13.9	Call Hold and Announcements (Music-on-Hold)	20
13.10	Sending and Receiving SIP Options	20
14	Annex for Emergency Center.....	20
14.1	Caller Identity Handling for Outgoing Calls (from the PSAP-PBX)	20
14.2	Network Services	21
14.2.1	CLIR (OIR) Override.....	21
14.2.2	COLP/COLR (TIP/TIR).....	21
14.2.3	Call Barring.....	21
14.3	Echo Cancellation	21
14.4	Protocol Profiles.....	21

Foreword

This Technical Specification (Technische Richtlinie, TR) has been produced by the Design & Coordination Squad of Deutsche Telekom Technik GmbH, Services & Platforms, Voice & Messaging (in the following named as Deutsche Telekom) and contains the description of the SIP (Gm) interface between SIP-PBXs using Direct Dial In (DDI) capability and the NGN platform of Deutsche Telekom.

This TR contains the current status of the SIP (Gm) interface of SIP-PBXs using Direct Dial In (DDI) capability which will be supported by the NGN platform of Deutsche Telekom.

Modifications in the main body as well as in the annexes of this document cannot be excluded at this point of time due to the still ongoing work on the referenced standards (e.g. 3GPP, ETSI) and some open decisions concerning the supported options.

The present document describes the final NGN platform of Deutsche Telekom; deviations to the currently provided solution of the NGN platform of Deutsche Telekom are possible (e.g. not yet realized service features).

1 Scope

The present document describes the SIP-interface between the Next Generation Network (NGN) of Telekom Deutschland (hereinafter called NGN) and SIP-PBXs using Direct Dial In (DDI) capability for the new Deutsche Telekom Product CompanyFlex.

The present Technical Specification (TR) is applicable to the SIP- and media (RTP) interface between a business customer's SIP-PBX with DDI and the NGN according to the AGB [1] of Deutsche Telekom.

The Deutsche Telekom NGN is an IMS Network. Therefore, the 1TR114 is a valid reference for more details.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

1. References are either specific (identified by date of publication and/or edition number or version number) or non specific.
 - For a specific reference, subsequent revisions do not apply.
 - For a non-specific reference, the latest version including amendments, errata and corrigenda applies.

Date of publication in square brackets [] refer just to the last known version while this document was in revision.

- [1] AGB: Allgemeine Geschäftsbedingungen der Deutschen Telekom
(see: www.telekom.de/agb)
- [2] 1TR114 version 3.0.0: Technical Specification of the SIP (Gm) interface between the User Equipment (UE) and the NGN platform of the Deutsche Telekom
- [3] ETSI TS 182 025: "Business trunking; Architecture and functional description".
- [4] IETF RFC 3261: "SIP: Session Initiation Protocol"
- [5] IETF RFC 3711: "The Secure Real-time Transport Protocol (SRTP)
- [6] IETF RFC 4568: "Session Description Protocol (SDP) Security Descriptions for Media Streams"
- [7] IETF RFC 4733: "RTP Payload for DTMF Digits, Telephony Tones, and Telephony Signals"
- [8] IETF RFC 4734: "Definition of Events for Modem, Fax, and Text Telephony Signals"
- [9] IETF RFC 5244: "Definition of Events for Channel-Oriented Telephony Signalling"
- [10] IETF RFC 7044: "An Extension to the Session Initiation Protocol (SIP) for Request History Information"

3 Definitions

For the purposes of the present document, the following terms and definitions apply:

Term	Definition / Remark
User Equipment	Any SIP device (terminal) at the subscriber premises used by an end user to communicate. It can be e.g. an IAD or telephone set, or any other telecommunication device.
User Agent	See RFC 3261 [4].
Call Control	In telephony, call control refers to the software within a telephone switch that supplies its central function. Call control decodes addressing information and routes telephone calls from one end point to another. It also creates the features that can be used to adapt standard switch operation to the needs of users. Call control software, because of its central place in the operation of the telephone network, is marked by both complexity and reliability.
NGN or NGN platform	The entire number of central servers and gateways, as well as software within the DT IP- network which provides voice services.
VoIP line	A VoIP line is equivalent to a MSN in ISDN; Multiple VoIP lines can be assigned to a VoIP account of the NGN
IP	Considering the expected parallel availability of IPv4 and IPv6 the term "IP" in this document is related to both internet protocol versions.
Pilot User	A Pilot User is represented by the identity which needs to be registered by a PBX in order to establish a Trunk Group between SIP-PBX and NGN ('Registrierungsrufnummer')
SIP-/IP-PBX	Private Branch Exchange using SIP
SIP-trunking interface	The interface between the NGN and a SIP-PBX with DDI which complies with this specification. A single SIP Trunk may contain one or multiple Trunk Groups.
Trunk Group	A Trunk Group is a route to the PBX, as recognized by the NGN (established by the registration of a Pilot User)
Shall	As usual within standards and documents of Deutsche Telekom, 3GPP, ETSI and ITU-T the word shall is used to indicate a procedure or requirement as mandatory. (Note)
Should	As usual within standards and documents of Deutsche Telekom, 3GPP, ETSI and ITU-T the word should is used to indicate a procedure or requirement as optional (Note)

Note: The key words "SHALL", "SHALL NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119.

4 General Description

4.1 Identities configured for the SIP-PBX and Addressing

The SIP-PBX phone number blocks, single numbers and one or multiple pilot number(s) (which are used only for registration purposes) are configured at the NGN and at the SIP-PBX. All headers that are used to carry Public Identities like From, To, Request-URI, P-Preferred-Identity, P-Asserted-Identity shall support a SIP URI format with the user part in E.164 format.

A default number is neither configured nor required as it is mandatory to provide a valid identity of the SIP Trunk in any call attempt.

Example:

Phone single number / Phone number blocks: sip:+49228123xxxx@tel.t-online.de Pilot number: sip:+49199296100xxxx@tel.t-online.de

The SIP-PBX shall send an E.164 phone number from the phone numbers assigned to the SIP-PBX in the P-Preferred-Identity or P-Asserted-Identity header field. The NGN checks both fields in exactly this order and enters the first match into the P-Asserted-Identity header field. If there is no match the call will be REJECTED (. This applies also when OIR/CLIR is active.

Note: Phone numbers in the P-Preferred-Identity or P-Asserted-Identity header field which are not assigned to the SIP-PBX will be rejected with SIP 403 whereas a Pilot number of the SIP-PBX in those headers will be rejected with SIP 488.

NB: SIP-PBX must provide the DDI in the SIP INVITEs that the customer wishes to see in his bill (Nebenstellenindividuelle Abrechnung).

5 Mode of Operation

5.1 Registration mode

The SIP-PBX shall send only one initial REGISTER request based on RFC 3261 to the NGN using the provided pilot number for that trunk. After a successful authentication all numbers related to the SIP trunk are implicitly registered.

Registrations as per RFC 6140 are NOT supported at this stage and might be added in later versions.

The NGN uses the SIP-Digest authentication. Nextnonce mechanism as per RFC 2617 shall be used to reduce signalling load (refer to 1TR114 for more details about Nextnonce).

Private Identity and Password for every Trunk Group of a SIP Trunk are provided by Deutsche Telekom as part of the customer contract and are accessible in the customer web portal ('Telefonie Benutzername/Passwort')

NB: The private identity is equal to the pilot number for the trunk to be registered as depicted in the example below

Example:

```
REGISTER sip:tel.t-online.de:5060;transport=tcp SIP/2.0

To: <sip:+49199296100xxxx@tel.t-online.de:5060;transport=tcp>

From: <sip:+49199296100xxxx@tel.t-online.de:5060;transport=tcp>;tag=abc

Call-ID: 1-2234@192.168.100.xxx

CSeq: 1 REGISTER

Authorization: Digest username="+49199296100xxxx@tel.t-online.de",realm="tel.t-online.de",cnonce="6b8b4567",nc=00000001,qop=auth,uri="sip:tel.t-online.de:5060;transport=tcp",nonce="xxx",response="yyy",algorithm=MD5

Contact: <sip:+49199296100xxxx@192.168.100.xxx:5060>"
```

The 200 OK to the Register Request will not include any P-Associated-URI header field, as it is anyway not honoured by SIP-PBX Vendors, which learn the associated Numbers to a Trunk by other means.

The implicitly registered identities for a given pilot user registration can be seen in the customer self-administration portal of the 'CompanyFlex' product.

Example:

```
Session Initiation Protocol (200)

Status-Line: SIP/2.0 200 OK

Message Header

Via: SIP/2.0/TCP
192.168.0.xxx:35823;received=80.156.51.xxx;rport=35823;branch=z9hG4bK940653da78f6efaf

Transport: TCP

Sent-by Address: 192.168.0.xxx

Sent-by port: 35823

Received: 80.156.51.xxx

RPort: 35823

Branch: z9hG4bK940653da78f6efaf

To: <sip:+49199296100xxxx@tel.t-online.de;user=phone>;tag=h7g4Esbg_f9a0d6b6025035750d20116f11f5bbb

From: <sip:+49199296100xxxx@tel.t-online.de;user=phone>;tag=b0248eef84

Call-ID: 03fbee8c2385e5e6

CSeq: 1040858242 REGISTER

Contact:
<sip:+49199296100xxxx@192.168.0.xxx:5060;transport=tcp>;expires=600;description="<sip:+49199296100xxxx@tel.t-online.de>"
```

The Reregistration timer shall be maximum 600 seconds

5.2 Static mode

The static mode of operation is out of scope for this specification and might be added in a later version.

6 Codecs

6.1 Telephony Codecs

- SIP-PBXs used for SIP-trunk shall support G.711a and should support G.722. A fallback to G.711a shall be possible.
- The codecs G.711 μ , G.729 and clear channel (RFC 4040) will not be modified in offers for calls via the NGN. They can be used if all involved elements (the B-party's end device as well as e.g. other carrier's nodes) agree in negotiating them.
- It is highly recommended to use a packetization Time (pTime) of 20ms for all Voice Codecs. Codecs with other pTime values up to and including 30ms shall be understood. A successful call setup for larger pTime values is not guaranteed.
- It is recommended to use a maximum packet time (maxpTime) of 20ms for all Voice Codecs.
- To avoid Codec Lockdown, it is highly recommended to only send one voice codec in the SDP answer.

6.2 Fax

- SIP-PBXs used for SIP-trunk shall support fax based on G.711a at least.
- The NGN supports the transmission of T.38 fax, in a passive, transparent way, if both user entities (caller and callee) are attached to the NGN using SIP-Trunks and they agree to use T.38 fax (offer-answer). (For details please refer to 1TR114)
- T.38 media encryption is not supported. Negotiations within an established connection for T.38 to a UE using encryption will be rejected with SIP Error code 488, so that fax transmission will use G.711 with encryption instead.

6.3 Video

- Video is currently NOT supported

7 Outbound Proxy Selection

If the access-line is provided by Deutsche Telekom, then the DNS server that is typically learned during the PPPoE Session setup shall be used for Outbound Proxy discovery.

The SIP-PBX shall discover the serving Outbound Proxy based on RFC 3263. That means, the SIP-PBX utilizes DNS NAPTR to determine the supported protocols (TCP or TCP over TLS) for the domain and SRV and A/AAAA Queries to determine hostnames, priorities, the IP Addresses and Port number of the NGN Outbound Proxy.

The outbound proxies that are used look as follows:

[integer string].primary.companyflex.de the mentioned integer string, as well as the other parts of the outbound proxy is shown in the customer portal.

The SIP-PBX can use TCP with RTP or TLS with SRTP as per Enterprise policy.

Standard query

Queries

[integer string].primary.companyflex.de: type NAPTR, class IN

Standard query response

Answers

[integer string].primary.companyflex.de. IN NAPTR 50 50 "s" "SIPS+D2T" _sips._tcp.primary.companyflex.de.

[integer string].primary.companyflex.de. IN NAPTR 100 50 "s" "SIP+D2T" _sip._tcp.primary.companyflex.de.

Standard query

Queries

_sips._tcp. [integer string].primary.companyflex.de: type SRV, class IN

Standard query response

Answers

_sips._tcp. [integer string].primary.companyflex.de: type SRV, class IN, priority 0, weight 5, port 5061, target server001.voip.t-ipnet.de

_sips._tcp. [integer string].primary.companyflex.de: type SRV, class IN, priority 1, weight 5, port 5061, target server002.voip.t-ipnet.de

_sips._tcp. [integer string].primary.companyflex.de: type SRV, class IN, priority 2, weight 5, port 5061, target server003.voip.t-ipnet.de

Additional records

server001.voip.t-ipnet.de: type A, class IN, addr 217.1.x.x

server002.voip.t-ipnet.de: type A, class IN, addr 217.1.y.y

server003.voip.t-ipnet.de: type A, class IN, addr 217.1.z.z

The SIP-PBX shall use the hostname with the highest priority as a Primary Outbound Proxy. Hostnames with lower priority shall be used only in case of failure of the Primary Outbound Proxy

8 Redundancy and Failover

The SIP-PBX may detect an outage of a SIP Outbound Proxy with help of different methods:

- The NGN responds with a 503 without retry after
- The NGN does not respond at all (TCP Timeout)
- The SIP-PBX might actively monitor the NGN with SIP OPTIONS packets in a frequency not shorter than 30 seconds.
- The NGN might ask explicitly the SIP-PBX to register to another destination by the means of a SIP 305 Packet where the alternative destination resides in the contact header.

In case that the SIP-PBX detects a failure as described above, the SIP-PBX shall use the hostname determined with the DNS NAPTR/SRV procedure with the lower priority.

The SIP-PBX shall NOT initiate any connection (TCP, SIP) to secondary A-record answer if no failure on the Primary is detected.

8.1 SIP N-way Redundancy

To support an N-way-redundancy the SIP-PBX shall register (N-1) redundant trunks with dedicated pilot numbers different than the one used for the first trunk (see chapter 3.1)

It is highly recommended to use another access for the redundant trunks to decouple access problem from SIP Problem as in the following figure.

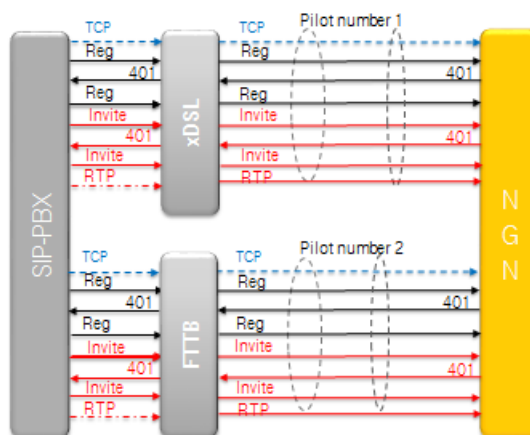


Figure 8-1: Redundant trunk registration (N=2) – simplified flow

In case of redundancy, the SIP registration of every pilot number implicitly registers the same set of number resources (DDI ranges or single numbers) which is associated with this redundant SIP Trunk.

Routing policies and number resources for the redundant SIP Trunk can be configured by the customer via NGN SIP Trunk Self-Administration portal.

Potential policies for a redundant SIP Trunk setup are load-sharing, failover, capacity management etc.

It is possible to register the second Trunk to a different outbound Proxy by using the domain [integer string].secondary.companyflex.de. The procedure is the same as explained in Chapter 7.

8.1.1 Trunk Capacity Management

The customer administrator may configure limits on active incoming calls, active outgoing calls, or all active calls (the sum of incoming and outgoing calls) for every dedicated redundant trunk.

For each new outgoing call, the NGN checks the capacity limits for all active calls and active outgoing calls. If the new call does not violate the capacity limits, then the NGN allows the call to continue. However, if the new call exceeds the capacity limit for all calls or for outgoing calls, the NGN blocks the call by sending a SIP 403 (Forbidden) response to the SIP INVITE request.

SIP-PBX which support SIP N-Way Redundancy according to clause 8.1 shall re-attempt to send an outgoing initial SIP INVITE request via an alternative trunk in case in case the NGN responds with SIP 403 (Forbidden) on the initial call attempt.

Details of the retry mechanism are SIP-PBX implementation specific but a SIP 403 (Forbidden) is used by the NGN to indicate that the capacity limit for a specific trunk is exceeded and re-routing shall be applied.

9 IP and Transport

9.1 IP-addresses

If NAT is not applied, a SIP-PBX connected to the NGN may use different IP-addresses for SIP-signalling and media.

IPv6 and IPv4 are supported. Both, SIP-signalling and media shall use either IPv4 or IPv6, but no mixture.

9.2 IPv6

The IPv6 multicast (ff00::/8) addresses shall NOT be used for SIP Trunking.

Global unicast Addresses shall be used instead (fc00::/7 -- fc00:: - fdff::)

We highly recommend NOT to use NAT in IPv6 Networks

9.3 Transport Protocols

A SIP-PBX connected to the NGN shall use TCP or TLS over TCP as transport protocol for SIP-signalling.

UDP is not supported as transport protocol for SIP-signalling.

Voice (RTP/SRTP) however uses UDP as transport protocol.

9.4 NAT-Traversal

The NGN provides support for NAT-traversal. The NGN NAT-traversal functionality relies on the SIP-PBX to comply to following requirements:

- SIP-PBXs knowing their public IP-address and public port information shall send this information in the VIA and CONTACT header fields.
- SIP-PBXs not knowing the public IP-address and public port information shall send a private IP-address (RFC 1918) in the VIA and CONTACT header fields. In that case the SIP-PBX shall send media streams with at least 3 RTP packets after retrieving or generating an SDP answer, even though no media needs to be played and ignoring any inactive, send-only or receive-only attributes.
- SIP-PBXs shall set-up the SIP transport protocol sessions, monitor their status, send CR/LF keep-alive messages as per RFC 5626 and activate or failover accordingly.
- SIP-PBXs shall use the same IP-address for SIP-signaling and media traffic
- The SIP-PBX shall reuse already existing TCP and TLS-connections to send and receive SIP-messages.

For keeping the NAT-Pinholes open for media, empty (no payload) RTP packets with payload type of 20 shall be sent by the SIP-PBX to the next hop session media ports: If the value 20 has already been negotiated then some other unused static payload type from Table 5 of RFC 3551 shall be used.

SIP OPTIONS and Frequent Reregistration shall NOT be used as a keep-alive mechanism for NAT-Traversal

9.5 TCP Connection Re-Use

If a SIP UA with a public IP address establishes a TCP connection on an ephemeral TCP port (e.g. 12345) and sends an INVITE where the Contact header field is not filled with its IP address and the ephemeral port but e.g. 5060, Requests will not be sent in the existing TCP session but P-CSCF will establish a new TCP session.

10 Signalling and media security

The NGN supports end-to-access-edge encryption for signalling and (S)RTP-media as in 1TR114. End-to-end encryption, for signalling or media, is not supported.

10.1 SIP security

SIP over TLS (v1.2 or higher) with encryption and server authentication (server certificate) is supported by the NGN. MD5 SIP Digest client authentication (password) is used to authenticate the SIP-PBX. The TLS-connection shall be initiated and maintained by the SIP-PBX and it shall be successfully setup before the SIP-PBX sends the REGISTER request.

Rekeying is NOT supported

10.2 Deutsche Telekom Certificate download

SIP-PBX shall install locally the certificate of Telesec Root-CA (manually) or it is pre-installed by the vendor of the corresponding operating system / SIP software.

The link to the certificate **Deutsche Telekom Root CA 2** is the following:

<https://www.telesec.de/de/public-key-infrastruktur/support/root-zertifikate/category/59-t-telesec-globalroot-class-2>

This link is subject to change by Telesec.

NB: depending on that certificate been used, only Telesec Root Certificate is required.
SIP-PBX shall check the validity of the certificate provided by P-CSCF with help of root certificate.

NB: Although RFC 5922 is not allowing wildcard certificates, Deutsche Telekom expects and requires PBX-Vendors to support it

10.3 Media Encryption

The NGN supports media encryption between the SIP-PBX and the NGN optionally. RTP-traffic may be encrypted using SRTP (RFC 3711 [5]) between the SIP-PBX and the Deutsche Telekom's NGN (end-to-access edge encryption). SDES (RFC 4568 [6]) is used for SRTP key exchange. Media encryption is used only in conjunction with SIP over TLS.

For calls from the SIP-PBX over SIP-trunks which use TLS for signalling, the NGN accepts SDP-offers only for SRTP.


For calls to the SIP-PBX and SIP-trunks which use TLS for signalling, the NGN only offers SDP with the profile RTP/SAVP and crypto-attribute, according to the RFC 4568. If the SIP-PBX rejects the RTP encryption, the call is lost, Fallback to RTP is not allowed according to the RFC 4568 [6].

A SIP-PBX which is configured to use TLS with SRTP shall only provide RTP/SAVP in SDP offer.

A SIP-PBX which is configured to use TCP with RTP shall only provide RTP/AVP in SDP offer.

A SIP-PBX shall not use TLS for the SIP-signalling if it is not prepared to accept SRTP in the SDP-offers, otherwise all calls to the SIP-PBX will definitively fail.

In case of media encryption, the transmission of fax is only possible via SRTP. T.38 Fax over UDPTL is rejected.

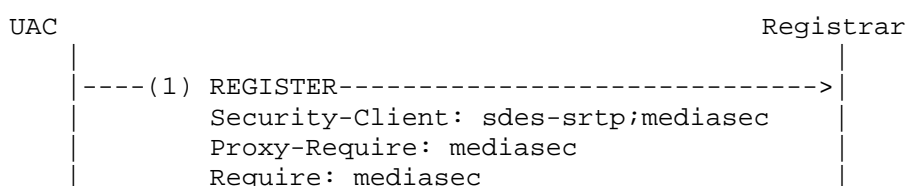

```

<---(2) 401-----
      Security-Server: msrp-tls;mediasec
      Security-Server: sdes-srtp;mediasec
      Security-Server: dtls-srtp;mediasec

----(3) REGISTER(with Authorization Header)--->
      Security-Client: sdes-srtp;mediasec
      Proxy-Require: mediasec
      Require: mediasec
      Security-Verify: msrp-tls;mediasec
      Security-Verify: sdes-srtp;mediasec
      Security-Verify: dtls-srtp;mediasec

<---(4) 200 OK-----

----(5) INVITE----->
      Security-Verify: msrp-tls;mediasec
      Security-Verify: sdes-srtp;mediasec
      Security-Verify: dtls-srtp;mediasec
      Proxy-Require: mediasec
      Require: mediasec
      a=3ge2ae:requested
      a=crypto:1 AES_CM_128_HMAC_SHA1_80 inline:EpcgtOdT5qd

<---(8) 200 OK-----
      a=crypto:1 AES_CM_128_HMAC_SHA1_80 inline:lnfakjh2sd1...

```

Figure 10-1: Exchange of media security mechanisms at initial registration

The same procedure described in the call flow applies for every ReInvites and Update message.

10.4 NTP

Although NTP is not required for basic SIP Trunking several SSL/TLS clients mandate successful NTP to successfully verify the certificate revocation list during TLS connection setup.

11 Emergency Calls and Special Numbers

11.1 Emergency Calls from a SIP-PBX to the NGN

The NGN detects emergency calls based on the phone number in the R-URI containing 110 or 112 (eventually with carrier prefix).

For SIP-PBXs using an access provided by Deutsche Telekom, the user location information is determined using the source-IP-address in the IP-packet carrying the INVITE-message. If the voice service is used at another location (nomadic use) or discharged through an internet connection at another location, then the emergency call center gets the phone number associated with the phone number but possibly with the address to the internet connection used belongs.

11.2 Special numbers

Special numbers shall be sent as dialed and not in E.164 format towards NGN according to Bundesnetzagentur.

The List of special numbers is as follows and where x = 1-9 and y = 0-9:

- 010xy Call by Call z.B. 01013<Vorwahl><Rufnummer>
- 0100yy Call by Call z.B. 010049<Vorwahl><Rufnummer>

- 116xxy z.B. 116116
- 118xy z.B. 11833
- 1180yy

- 11800x
- 11x x= 0, 1, 2, 3, 4, 5. 6. 7

11.3 DTMF

For DTMF events RFC 4733 [7] and RFC 5244 [9] shall be supported.

For support of DTMF RTP Out-of-Band in binary format RFC 4733 [7] and RFC 4734 [8] shall be supported.

Note: In cases where the remote Endpoint does not support RFC4733 [7] it shall be possible to send DTMF in-band

11.4 Early Media Support

Early media and the P-Early-Media header field shall be supported according to 1TR114 [2], otherwise announcements and ringback tones may not work properly. A SIP-PBX which does not support the P-Early-Media header field should be able to detect early media and be prepared to generate the ringback tone locally if no early media is received.

12 Basic Call

12.1 Incoming Calls from the Service Provider to SIP-PBX

The UE/SIP-PBX shall display the identity provided in the From Header, since a P-Asserted-Identity header field may not be available in all cases.

The Identity of the callee is in the Req-URI as per SipConnect 2.0. The UE/SIP PBX must support the SIP History-Info header field as specified in RFC 7044.

```
Request-Line: INVITE sip:+499125580xxxx@tel.t-online.de; transport=tcp SIP/2.0
Message Header
Max-Forwards: 68
Via: SIP/2.0/TCP 80.156.151.xxx:5060;branch=z9hG4bKg3Zqkv7ic1pmi9jo7htl6mhvj2i8slzno
To: <sip:+499125580xxxx@tel.t-online.de;user=phone>;cscf
From: <sip:+492284225xxxx@tel.t-online.de;user=phone>;tag=h7g4EsbG_2044599896-1531919887568-
Call-ID: BW151807568180718318543956@10.102.237.2
CSeq: 382023273 INVITE
Contact: <sip:sgc_c@80.156.151.xxx;transport=tcp>
Record-Route: <sip:80.156.151.xxx;transport=tcp;lr>
Accept-Contact: *;explicit;description="<sip:+49199296100xxxx@tel.t-online.de>";require
Min-Se: 900
Privacy: none
Session-Expires: 1800;refresher=uac
Supported: 100rel
Supported: timer
Content-Type: application/sdp
Content-Length: 164
Recv-Info: x-broadworks-client-session-info
Allow: ACK, BYE, CANCEL, INFO, INVITE, OPTIONS, PRACK, REFER, NOTIFY, UPDATE
Accept: application/btbc-session-info
Accept: application/dtmf-relay
Accept: application/media_control+xml
Accept: application/sdp
Accept: multipart/mixed
History-Info: <tel:+499125580xxxx>;index=1,
               <sip:+49170780xxxx@tel.t-online.de;transport=tcp;user=phone>;index=1.1,
               <sip:+496151583xxxx@tel.t-online.de;transport=tcp;user=phone;cause=302>;index=1.1.1
```

12.2 Outgoing calls from SIP-PBX to the service provider

The SIP-PBX shall not make use of diversion header fields in outgoing calls. These header fields when coming from SIP-PBXs are ignored in the NGN.

The session Timer shall be set to 1800

```
Request-Line: INVITE sip:+492284225xxxx@tel.t-online.de;user=phone;transport=tcp SIP/2.0
```

Message Header

```
Via: SIP/2.0/TCP 192.168.2.xxx:37673;branch=z9hG4bK92c218a2a66b89b0f;rport
```

```
Route: <sip:80.156.151.xxx;lr;transport=tcp>
```

```
Max-Forwards: 70
```

```
From: <sip:+499125580xxxx@tel.t-online.de;user=phone>;tag=4b73a8d7eb
```

```
To: <sip:+492284225xxxx@tel.t-online.de;user=phone>
```

```
Call-ID: 988a2dd34c2ba580
```

```
CSeq: 1914213343 INVITE
```

```
Allow: INVITE, ACK, OPTIONS, BYE, CANCEL, REGISTER, INFO, UPDATE
```

```
Contact: <sip:+49199296100xxxx@192.168.2.xxx:37673;transport=tcp;user=phone>
```

```
Min-SE: 900
```

```
Session-Expires: 1800
```

```
Supported: 100rel, timer
```

```
P-Preferred-ID: <sip:+4991255804xxxx@tel.t-online.de;user=phone>
```

```
User-Agent: SIP-PBX-VENDOR
```

```
Content-Type: application/sdp
```

```
Content-Length: 306
```

12.3 Sending of non-100-Responses

When the UA receives an INVITE, the UA shall send within 3s a non-100 response corresponding to its status (e.g. 180 Ringing, 181 Call is being forwarded, 183 Session Progress) to avoid cancelling or rerouting of the call.

13 Supported Services

Most of the NGN based services can be configured by the customer in the NGN SIP Trunk Self Administration portal.

13.1 CLIP/CLIR (OIP/OIR)

CLIP (OIP) enables displaying the telephone number of the originating A-subscriber towards terminating B-subscriber (feature's user) depending on the information provided. The telephone number of the A-subscriber is transferred to the B-subscriber, irrespective of whether the user entities' device displays the information provided for the B-subscriber and can process it or not. CLIP/OIP is always enabled for NGN SIP Trunks and can't be disabled.

CLIR (OIR) restricts the presentation of the telephone number of the A-subscriber (feature's user) at the B-subscriber. The feature can be configured for permanent or per call. The feature's state of CLIR can be controlled by the customer in the self-administration portal of the product.

If an anonymized From: header field or a Privacy header field set to "id" is received, then a Privacy header field is set to "user,id" by the NGN.

13.2 COLP/COLR (TIP/TIR)

The NGN-based TIP/TIR service is described in [2].

For SIP-trunking, COLR provides the restriction of the presentation of the phone number from the called party to the calling party, permanent or per call. COLP provides the presentation of the phone number from the called party to the calling party (COLP). By this the returned phone number of the actually reached calling-subscriber is sent. The feature's state of COLR/TIR can be controlled by the customer in the self-administration portal of the product. COLP/TIP is always enabled for NGN SIP Trunks and can't be disabled.

13.3 CLIP no Screening

CLIP no screening allows the presentation of an arbitrary chosen number even out of range of the prefix assigned to the SIP-Trunk to called party. No verification of the phone number sent by the terminal in the From: header field is done by the NGN.

In the P-preferred Id or in the PAI header a number from the range of the prefix of the SIP-Trunk shall be provided. Otherwise calls will be rejected.

The feature's state of CLIP no screening applies at the SIP-trunk-level.

It is in the responsibility of the calling party not to use forbidden numbers in FROM according to TKG §66k.

13.4 Call Forwarding by Deflection (302)

A SIP-PBX may initiate network-based Call Forwarding by responding to a SIP INVITE with a 302 SIP response which contains the new target in the Contact-header. The SIP-PBX shall add a SIP History-Info header field.

The NGN will forward the INVITE to the new target and sends a 181 SIP response to the caller.

13.5 Call Forwarding by New INVITE

To forward with a new INVITE (on or out of dialog), the SIP-PBX must follow the procedures in SIPCONNECT 2.0 Chapter 11.1 with the following clarifications:

- The request-URI identifying the forwarded-to target destination.
- A History-Info header field containing the Enterprise Public Identity of the forwarding user
- A P-Asserted-Identity header field or P-Preferred-Identity header field containing a valid identity of the forwarding user.
- In order to enable the NGN to supervise the status of the call setup towards a SIP-PBX in case of call forwarding, the SIP-PBX shall generate a 18x response message (181 (Call is Being Forwarded) or 183 (Session Progress) without SDP) and send it to the originating user as soon as the call forwarding has been applied.
- In case a 181 response is sent to the originating user with information about the diverted-to identity, the SIP-PBX shall include a SIP URI of the diverted-to user into a History-Info header field in a 181 (Call Is Being Forwarded) response message and send it to the originating user. As it is not known what the diverted-to user's TIR settings are, a Privacy header field with a priv-value set to "history" needs to be included in escaped form in the hi-entry representing the diverted-to user.

- In case a 180 (Ringing) has been received from the diverted-to user, a 180 response (with or without SDP) shall be sent to the originating user.

Please note that in case of Call Forwarding without proper History-Info header field, the identity in FROM-header field will be screened by the network. In case the original caller identity shall be transported transparently, then either History-Info header field or CLIP No Screening is necessary.

13.6 Call Transfer

Call Transfer is supported by the use of INVITES/re-INVITE. This is in accordance with the recommendations of SIPCONNECT 2.0. Alternatively, the refer method is also supported.

13.7 Call by Call

The feature Call by Call allows the SIP-PBX to select a VoIP Service Provider differing from Deutsche Telekom for single calls. The customer selects the Service Provider by adding a 010 prefix followed by terminal network operator code and the desired destination number.

13.8 Advice of Charge

AoC is currently not supported.

13.9 Call Hold and Announcements (Music-on-Hold)

The NGN does not provide announcements or MOH on behalf of a SIP-PBX connected to the NGN via a SIP-Trunk. The NGN Announcement Server is not triggered in case of Call Hold initiated by a SIP-PBX which is connected via a SIP-trunk to the NGN.

13.10 Sending and Receiving SIP Options

OPTIONS and many of the status codes are described within RFC 3261. SIP Options are used to check the availability of a PBX. The PBX shall respond an OPTION with 200 OK if is running properly.

SIP OPTIONS may also be sent by the PBX with an interval of at least 30 sec to check the availability of the P-CSCF. The P-CSCF will answer with 200 OK if everything works fine.

For media supervision, an RTP timeout is signaled after 10s and a SIP OPTIONS is subsequently sent to the A-Party. If the SIP OPTIONS is not replied, the call will be released.

A SIP OPTIONS will only be acknowledged if the IP address of the P-CSCF is sent in both the Request Line and the To header field, otherwise they will be declined with a SIP 403 (Forbidden).

14 Annex for Emergency Center

This annex describes the special implementation behavior of Emergency End devices used by PSAP e.g. police, fire force etc. Additionally, to the listed features/configuration in this TR, the PSAP-PBX shall support the requirements below.

14.1 Caller Identity Handling for Outgoing Calls (from the PSAP-PBX)

Within the context of an PSAP-PBX the PBX is not allowed to send outgoing calls, i.e. no INVITE.

The PSAP-PBX shall have the possibility to configure such a profile or Outgoing Call Barring for registered PSAP IMPUs.

Note: The IMS will have a specific profile for PSAPs which will also block the related PSAP IMPUs for outgoing calls.

14.2 Network Services

14.2.1 CLIR (OIR) Override

CLIR (OIR) restricts the presentation of the telephone number of the A-subscriber (feature's user) at the B-subscriber. For PSAP-PBX accounts the OIR override feature for terminating calls is permanently configured for the PSAP-MSN.

If privacy extensions are received it shows that the originating party has subscribed to the OIR services. Nevertheless, in any case the PSAP-PBX shall present the identity of the originating party.

Note: Based on the network configuration such privacy extensions may be deleted.

14.2.2 COLP/COLR (TIP/TIR)

For SIP-trunking, COLR (TIR) provides the restriction of the presentation of the phone number from the called party to the calling party, permanent or per call. For the PSAP-PBX the TIR service is activated permanently.

14.2.3 Call Barring

Barring of numbers is supported for incoming and outgoing calls. Barring is used by administrating a blacklist and/or whitelist. Barring can be administered by the VoIP provider and the business customer. Configured black- and/or whitelists applies on SIP-trunk-level.

Outgoing call barring is permanently activated on network level for a PSAP-PBX.

Outgoing call barring on PSAP-PBX level may apply in addition.

14.3 Echo Cancellation

In case where an echo can appear the PSAP-PBX shall support a proper echo cancelation according to international standards like ITU-T G.168.

14.4 Protocol Profiles

Accordingly, to the emergency requirements in Germany it is necessary for the PSAP-PBX shall support the following SIP Header Fields and MIME Bodies:

- SIP Geolocation Header Field and MIME-/Body according to RFC 6442
- SIP User to User Information (UUI) Header Field/Body according to RFC 7433 for the transport of Location Data
- SIP Emergency Provider Info according to RFC 7852 for the transport of Provider Data
- Location Source SIP Header Field Parameter according to RFC 6442
- P-Access-Network-Information (PANI) Header Field according to RFC 7315

Note: If multiple P-Access-Network-Info header fields are received, they will be combined and sent as a single header field with multiple comma-separated header field values. E.g. P-Access-Network-Info: 3GPP-E-UTRAN-

FDD;utran-cell-id-3gpp=2620100791d31a00;network-provided,3GPP-E-UTRAN-FDD;utran-cell-id-3gpp=2620100791D31A00

List of Abbreviation

Abbreviations and definitions, not listed hereafter, are defined in the reference documents in clause 3.

For the purposes of te present document, the following abbreviations apply:

-1-

3GPP Third Generation Partnership Project

-A-

AAA Authorization Authentication Accounting

ACR Anonymous Communication Rejection

AGB Allgemeine Geschäftsbedingungen

AOC Advice Of Charge

-B-

-C-

CC Call Control

CCBS Completion of Communications to Busy Subscriber

CDIV Communication Diversion Services

CFNL Call Forwarding Not Logged-in

CLIP Calling Line Identification Presentation

CLIR Calling Line Identification Restriction

CN Calling Number (Calling Party Number), e.g. <CN>

COLP Connected Line Identification Presentation

COLR Connected Line Identification Restriction

CW Call Waiting

-D-

DDI Direct Dial In

DNS Domain Name System

DT Deutsche Telekom

-E-

ETSI European Telecommunication Standardisation Institute

-F-

FQDN Fully Qualified Domain Name

-G-

GRUU Globally Routable User Agent URI

-H-

HTTP Hypertext Transfer Protocol

-I-

IAD	Integrated Access Device
IETF	Internet Engineering Task Force
IP	Internet Protocol
IPv4	Internet Protocol Version 4
IPv6	Internet Protocol Version 6
ISDN	Integrated Services Digital Network
-J-	
-K-	
-L-	
-M-	
MGC	Media Gateway Controller
MSN	Multiple Subscriber Number
-N-	
NAT	Network Address Translation
NGN	Next Generation Networks
-O-	
OIP	Originating Identification Presentation
OIR	Originating Identification Restriction
-P-	
PAI	P-Asserted-Identity
PPI	P-Preferred-Identity
PBX	Private Branch Exchange
PSTN	Public Switched Telephone Network
-Q-	
QoS	Quality of Service
-R-	
RFC	Request for Comments
RTCP	Real Time Control Protocol
RTP	Real Time Transport Protocol
-S-	
SDES	Session Description Protocol Security Descriptions
SDP	Session Description Protocol
SIP	Session Initiation Protocol
SRTP	Secure Real-time Transport Protocol
STUN	Simple Traversal of User Datagram Protocol (UDP) Through Network Address Translators (NATs);
-T-	
TBC/TBD	To be clarified/To be done
TCP	Transmission Control Protocol
TCP/IP	Transmission Control Protocol / Internet Protocol

TIP	Terminating Identification Presentation
TIR	Terminating Identification Presentation Restriction
TKG	Telekommunikationsgesetz
TLS	Transport Layer Security
TR	Technical Recommendation
TURN	Traversal Using Relays around NAT

-U-

UA	User Agent
UAC	User Agent Client
UAS	User Agent Server
UDP	User Datagram Protocol
UDPTL	UDP Transport Layer
UE	User Equipment
URI	Universal Resource Identifier
URL	Uniform Resource Locator

-V-

VoIP	Voice over Internet Protocol
------	------------------------------


-W-

-X-

-Y-

-Z-

Deutsche Telekom Company Flex SIP Trunk & CUBE – INTEROPERABILITY Template

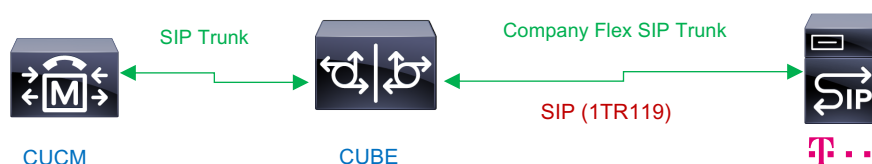

Please note:

- In this example CUBE has public internet IP-address.
- Outbound Proxy resolved via DNS SRV and contains a customer ID
dns:5511<customerID>.primary.companyflex.de
- Registration contains a registration number, which is a unique identifier for the SIP trunk. With the registration number it is possible to register multiple SIP trunk DDI numbers in a single registration (Centralized SIP Trunk)
 - <+49199registration-number>
 - +4969-5674711-(0-9)
 - +49228-1234-(0-9)
- If CUBE is behind a NAT Router or Firewall, additional configuration parameters needed:
 - Public DNS servers, Stun for media latching

Versions:

- CUCM 12.5.1SU1
- isr4400-universalk9.16.12.01a.SPA.bin

CUCM Configuration:

SIP Trunk to CUBE:

- Asserted ID: **P-Preferred Identity**
- Calling Party Selection: **Last Redirect Number**: With this parameter and “**Enable External Presentation Name and Number**” in SIP Profile for the SIP Trunk, the Device Line DN or external phone number mask is used for the PPI value, if the DN has callforward enabled to PSTN. From header contains the calling party number from Phone or PSTN.

Trunk Configuration

Save Delete Reset Add New

Consider trunk on this trunk secure when using both SRTP and TLS

Route Class Signaling Enabled* Default

Use Trusted Relay Point* Default

PSTN Access

Run On All Active Unified CM Nodes

Intercompany Media Engine (IME)

E.164 Transformation Profile < None >

MLPP and Confidential Access Level Information

MLPP Domain < None >

Confidential Access Mode < None >

Confidential Access Level < None >

Call Routing Information

Remote-Party-Id

Asserted-Identity

Asserted-Type* PPI

SIP Privacy* Default

Trust Received Identity* Trust All (Default)

Inbound Calls

Significant Digits* All

Connected Line ID Presentation* Default

Connected Name Presentation* Default

Calling Search Space PCP_Site One_DEVICE_CSS

Trunk Configuration

Save Delete Reset Add New

Connected Party Transformation CSS < None >

Use Device Pool Connected Party Transformation CSS

Outbound Calls

Called Party Transformation CSS < None >

Use Device Pool Called Party Transformation CSS

Calling Party Transformation CSS < None >

Use Device Pool Calling Party Transformation CSS

Calling Party Selection* Last Redirect Number (External)

Calling Line ID Presentation* Default

Calling Name Presentation* Default

Calling and Connected Party Info Format* Deliver DN only in connected party

Redirecting Diversion Header Delivery - Outbound

Redirecting Party Transformation CSS < None >

Use Device Pool Redirecting Party Transformation CSS

Presentation Information


Anonymous Presentation

Presentation Number

Presentation Name

Send Presentation Name and Number only in the FROM header and not in the other identity headers

SIP Profile for the SIP Trunk to CUBE:

Best Effort (no MTP inserted) 

Enable ANAT
 Deliver Conference Bridge Identifier
 Enable External Presentation Name and Number
 Reject Anonymous Incoming Calls
 Reject Anonymous Outgoing Calls
 Send ILS Learned Destination Route String
 Connect Inbound Call before Playing Queuing Announcement

SIP OPTIONS Ping

Enable OPTIONS Ping to monitor destination status for Trunks with Service Type "None (Default)"
 Ping Interval for In-service and Partially In-service Trunks (seconds)*
 Ping Interval for Out-of-service Trunks (seconds)*
 Ping Retry Timer (milliseconds)*
 Ping Retry Count*

SDP Information

Send send-receive SDP in mid-call INVITE
 Allow Presentation Sharing using BFCP
 Allow IX Application Media
 Allow multiple codecs in answer SDP

CUBE Konfiguration:

- Voice-Class Tenants:
 - 1000: Tenant for CUCM parameters
 - 2000: Tenant for Companyflex parameters

- Dial-Peers:
 - 2001: Incoming Dial-Peer - CompanyFlex PSTN → CUBE
 - 2051: Outgoing Dial-Peer, CUBE → CompanyFlex PSTN
 - 1051: Outgoing Dial-Peer, CUBE → CUCM
 - 1001: Incoming Dial-Peer, CUCM → CUBE

- Dial-Peer Group's
 - **DPG: 1001 --> 2051**
 - **DPG: 2001 --> 1051**

!

voice service voip

ip address trusted list

ipv4 217.0.0.0 255.255.224.0

ipv4 217.0.128.0 255.255.248.0

address-hiding

mode border-element license capacity <number of CUBE licenses>

allow-connections sip to sip

fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback pass-through g711alaw
h323

call service stop

sip

min-se 900 session-expires 1800

no update-callerid

sip-profiles inbound

audio forced

!

!

voice class uri CUCMIN sip

host ipv4: <CUCM IP addresses>

voice class codec 1

codec preference 1 g711alaw

codec preference 2 g722-64

!

!

voice class sip-profiles 2000

rule 1 request INVITE sip-header P-Asserted-Identity remove

!

voice class sip-profiles 2001

rule 1 request ANY sip-header Contact modify "<sip:(.*)@" "<sip:+49199Registration
Number@"

rule 2 response ANY sip-header Contact modify "<sip:(.*)@" "<sip:+49199Registration
Number@"

rule 3 request ANY sip-header Session-ID remove

rule 4 response ANY sip-header Session-ID remove

rule 5 request BYE sip-header P-Preferred-Identity remove

!

voice class sip-profiles 2051

rule 1 request INVITE peer-header sip P-Preferred-Identity copy "sip:(.*)@" u01

rule 2 request INVITE sip-header P-Preferred-Identity modify "<sip:.*@(.)>"

"<sip:\u01@tel.t-online.de>"

rule 3 request INVITE sip-header P-Early-Media add "P-Early-Media: supported"

rule 4 request ANY sip-header Contact modify "<sip:(.*)@" "<sip:+49199Registration
Number@"

rule 5 response ANY sip-header Contact modify "<sip:(.*)@" "<sip:+49199Registration
Number @"

rule 6 request ANY sip-header Session-ID remove

rule 7 response ANY sip-header Session-ID remove

rule 8 request BYE sip-header P-Preferred-Identity remove

```
!  
!  
voice class sip-copylist 1000  
  sip-header P-Preferred-Identity  
!  
voice class e164-pattern-map 2000  
  e164 010T  
  e164 116...  
  e164 118..  
  e164 11[025]  
  e164 +T  
!  
!  
voice class dpg 1001  
  description * Incoming match from CUCM. Send call to destination DP 2051 *  
  dial-peer 2051  
!  
voice class dpg 2001  
  description * Incoming match from PSTN. Send call to destination DP 1051 *  
  dial-peer 1051  
!  
voice class server-group 1000  
  ipv4 <CUCM IP addresses>  
  description **CUCM Server Group**  
!  
voice class tenant 1000  
  no remote-party-id  
  session transport tcp  
  no session refresh  
  header-passing  
  error-passthru  
  bind control source-interface GigabitEthernet<X/X/X>  
  bind media source-interface GigabitEthernet<X/X/X>  
  no pass-thru content custom-sdp  
  privacy-policy passthru  
!  
voice class tenant 2000  
  registrar dns:tel.t-online.de expires 480 tcp  
  credentials number <+49199registration-number> username <+49199registration-  
number>@tel.t-online.de password 0 <password> realm tel.t-online.de  
  authentication username <+49199registration-number>@tel.t-online.de password 0  
<password> realm tel.t-online.de  
  no remote-party-id  
  timers dns registrar-cache ttl  
  sip-server dns:tel.t-online.de  
  session transport tcp  
  no session refresh  
  header-passing
```



```
error-passthru
asserted-id ppi
bind control source-interface <Interface>
bind media source-interface <Interface>
no pass-thru content custom-sdp
conn-reuse
outbound-proxy dns:5511<customerID>.primary.companyflex.de
privacy-policy passthru
!
!
!
dial-peer voice 1001 voip
description ***Inbound CUCM DIAL-PEER***
session protocol sipv2
destination dpg 1001
incoming uri via CUCMIN
voice-class codec 1
voice-class sip tenant 1000
voice-class sip copy-list 1000
dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
no vad
!
dial-peer voice 1051 voip
description ***Outbound CUCM DIAL-PEER***
huntstop
destination-pattern <+49Customer PSTN Number>
session protocol sipv2
session server-group 1000
voice-class codec 1
voice-class sip tenant 1000
dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
no vad
!
dial-peer voice 2001 voip
description ***inbound PSTN DIAL-PEER ***
session protocol sipv2
destination dpg 2001
incoming called-number <+49Customer PSTN Number>
voice-class codec 1
voice-class sip profiles 2001
voice-class sip profiles 2000 inbound
voice-class sip tenant 2000
dtmf-relay rtp-nte
fax-relay ecm disable
```

```
fax rate 14400
ip qos dscp cs6 signaling
clid strip name
no vad
```

```
!
dial-peer voice 2051 voip
description ***Outbound PSTN DIAL-PEER ***
session protocol sipv2
session target sip-server
destination e164-pattern-map 2000
voice-class codec 1
voice-class sip profiles 2051
voice-class sip tenant 2000
dtmf-relay rtp-nte
fax-relay ecm disable
fax rate 14400
ip qos dscp cs6 signaling
clid strip name
no vad
```

```
!
```

```
!
```

```
!
```

```
sip-ua
timers connection aging 10
no transport udp
transport tcp tls v1.2
```

```
!
```