



Article ID: 4995

Firmware/Language Upgrade on the RV130 and RV130W Using the Web Interface

Objective

Upgrading to the latest firmware can help fix bugs and other intermittent issues on the router. Language files can also be applied to change the native language of the configuration utility.

The objective of this document is to show you how to upgrade the firmware and/or language on the RV130 and RV130W Routers.

Applicable Devices

- RV130
- RV130W

Upgrading the Language/Firmware

Step 1. Log in to the web configuration utility and choose **Administration > Firmware/Language Upgrade**. The *Firmware/Language Upgrade* page opens:

Firmware/Language Upgrade

System Information

Device Model:	RV130W
PID VID:	RV130W-A V01
Current Firmware Version:	1.0.1.3
Latest Firmware Version:	1.0.1.3
Current Language Version:	
Firmware Last Updated:	01/01/10 12:14 AM

Download the latest firmware: [Download](#)

Automatic Firmware Upgrade

Interval - Check every:

Automatically Upgrade:

Notify via

Admin GUI

Email to Please configure email settings to enable notifications.

Manual Firmware/Language Upgrade

File Type: Firmware Image Language File

Upgrade from: cisco.com

Note: You can check the device model and current firmware version in the *System Information* area.

Automatic Firmware Upgrade

Step 1. From the *Interval - Check every* drop-down list, choose how often you would like the device to automatically check with Cisco for possible firmware revisions.

Automatic Firmware Upgrade

Interval - Check every:

Automatically Upgrade:

Notify via


Admin GUI

Email to Please configure email settings to enable notifications.

The options are listed as follows:

- Never
- Week
- Month

Step 2. Click the **Check Now** button to check for a firmware upgrade now.

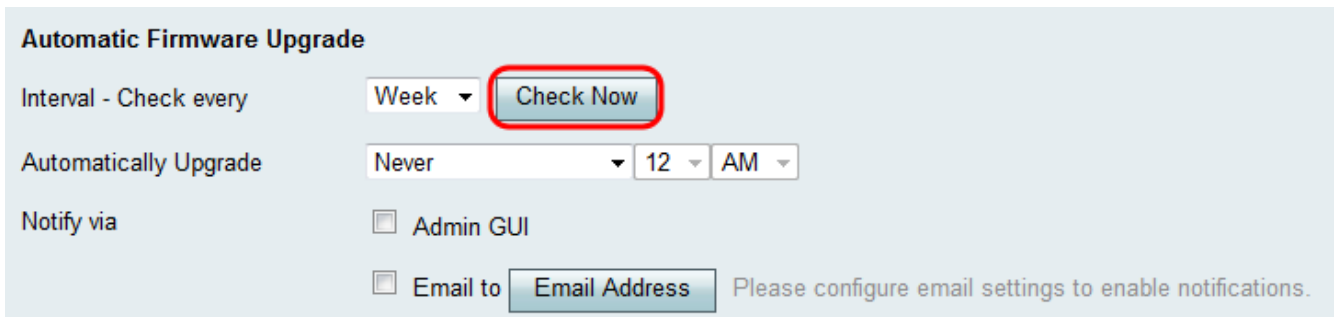

Automatic Firmware Upgrade

Interval - Check every: Week ▾ **Check Now**


Automatically Upgrade: Never ▾ 12 ▾ AM ▾

Notify via

Admin GUI

Email to Please configure email settings to enable notifications.

Step 3. From the *Automatically Upgrade* drop-down list, choose when you would like the device to automatically upgrade once new firmware has been detected.

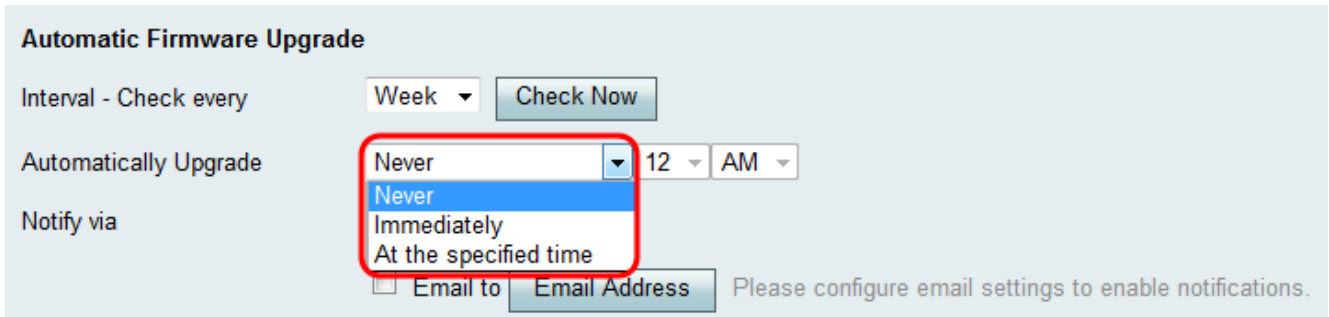

Automatic Firmware Upgrade

Interval - Check every: Week ▾

Automatically Upgrade: Never ▾ 12 ▾ AM ▾


Notify via

Email to Please configure email settings to enable notifications.

The available options are defined as follows:

- **Never** — Allows you to manually control the upgrade configurations of all devices on your network. Manually upgrading may be helpful if you have a complex network, and devices require specific configurations.
- **Immediately** — Ensures that your devices will have the latest firmware as soon as new firmware has been detected.
- **At the specified time** — Allows you to select an appropriate time for devices to automatically upgrade. At appropriate time to choose might be when there is little to no traffic on your network.

Step 4. If you chose **At the specified time** in Step 3, enter the specific time to automatically upgrade in the corresponding drop-down lists. Otherwise, you may skip this step.

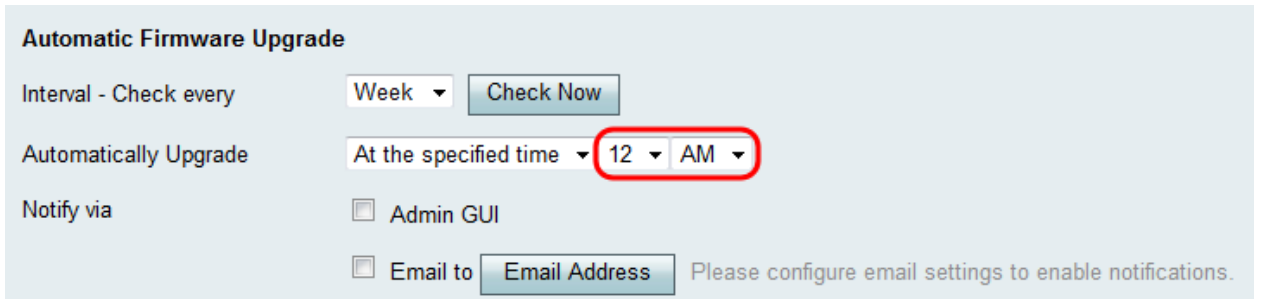

Automatic Firmware Upgrade


Interval - Check every

Automatically Upgrade

Notify via Admin GUI

Email to Please configure email settings to enable notifications.

Step 5. In the *Notify via* field, check the desired check boxes to indicate how the device informs you when new firmware becomes available and/or when it is automatically installed by the device.

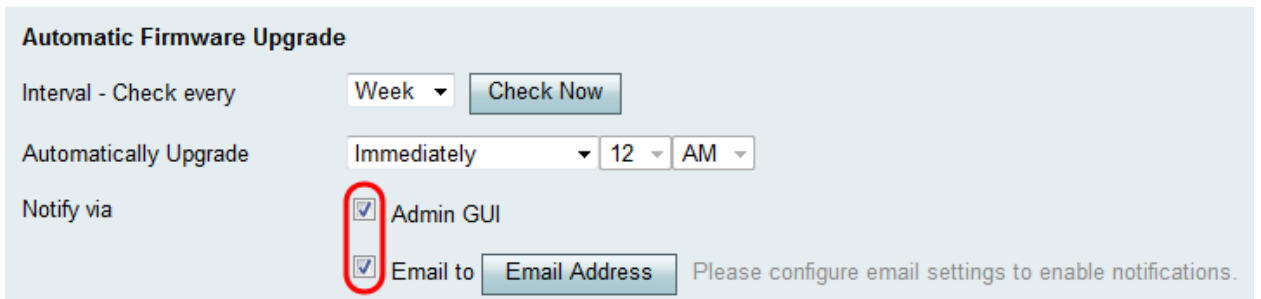

Automatic Firmware Upgrade

Interval - Check every

Automatically Upgrade

Notify via Admin GUI

Email to Please configure email settings to enable notifications.

The available options are defined as follows:

- Admin GUI — The notifications will appear on the administrator’s interface.
- Email to — The notifications will be sent to a configured e-mail address.

Step 6. If you checked the **Email to** check box in Step 5, click the **Email Address** button. The *E-mail Settings* page appears:

E-mail Settings

E-mail Alert Configuration

New Firmware E-mail Alert: Enable

E-mail Logs: Enable

Log E-mail Configuration

Minimum Email Log Severity: All

Send E-mail Logs by Schedule

Unit:

Day:

Time:

E-mail Settings

E-mail Server Address: (Hint: mail.abc.com)

E-mail Server Port: (Range: 1 - 65535, Default: 25)

Return E-mail Address: (Hint: test@abc.com)

Send to E-mail Address (1): (Hint: test@abc.com)

Send to E-mail Address (2) (Optional):

Send to E-mail Address (3) (Optional):

Step 7. In the *New Firmware E-mail Alert* field, check the **Enable** check box to enable the device to alert you of firmware upgrades via e-mail.

E-mail Settings

E-mail Alert Configuration

New Firmware E-mail Alert: **Enable**

E-mail Logs: Enable

Note: In order to fully configure the e-mail alert, refer to Email Settings on the RV130 and RV130W. Once you are finished, navigate back to the *Firmware/Language Upgrade* page by choosing **Administration > Firmware/Language Upgrade**.

Manual Firmware/Language Upgrade

Step 1. In the *File Type* field, click the radio button for the type of file you wish to load onto the device.

Manual Firmware/Language Upgrade

File Type: Firmware Image Language File

Upgrade from: cisco.com

PC

Reset all configuration/settings to factory defaults.

The device will be automatically rebooted after the update is complete

The available options are defined as follows:

- Firmware Image — A Firmware Image is used to upgrade the firmware version of a device.
- Language File — A Language File that is used to upgrade the native language of the device.

Step 2. In the *Upgrade from* field, choose where you want the upgrade file for your device to be uploaded from.

Manual Firmware/Language Upgrade

File Type: Firmware Image Language File

Upgrade from: cisco.com

PC

Reset all configuration/settings to factory defaults.

The device will be automatically rebooted after the update is complete

The available options are defined as follows:

- cisco.com — Installs the latest upgrade file directly from the *Cisco Support & Download* webpage. This option is unavailable for Language Files, because language upgrades require custom specification of which language to change to. If this is chosen, skip to Step 4.
- PC — Installs an existing upgrade file from a directory on your personal computer. Upgrading from your PC may be useful if you have the file for a specific firmware version or language that you want to upgrade to.

Step 3. If you chose to upgrade from your PC in Step 2, Firmware Images and Language Files provided by Cisco can be manually downloaded onto your computer. Otherwise you may skip this step. Under the *System Information* section of the page, click the **Download** link in the *Download the latest firmware* field. A new browser window will open directing you to the *Cisco Support & Download* webpage.

System Information	
Device Model:	RV130W
PID VID:	RV130W-A V01
Current Firmware Version:	1.0.1.3
Latest Firmware Version:	1.0.1.3
Current Language Version:	
Firmware Last Updated:	01/01/10 12:14 AM
Download the latest firmware:	Download

Step 4. (Optional) If you want the device to revert to factory default settings when the firmware/language upgrade is applied, check the **Reset all configurations/settings to factory defaults** check box. The changes are applied after the device reboots.

Manual Firmware/Language Upgrade	
File Type:	<input checked="" type="radio"/> Firmware Image <input type="radio"/> Language File
Upgrade from:	<input checked="" type="radio"/> cisco.com
	<input type="radio"/> PC <input type="text"/> <input <="" td="" type="button" value="Browse..."/>
	<input checked="" type="checkbox"/> Reset all configuration/settings to factory defaults.
<input type="button" value="Start Upgrade"/>	The device will be automatically rebooted after the update is complete

Step 5. Click **Start Upgrade** to begin the upgrade. The device will automatically reboot once the update is complete.

Manual Firmware/Language Upgrade	
File Type:	<input checked="" type="radio"/> Firmware Image <input type="radio"/> Language File
Upgrade from:	<input checked="" type="radio"/> cisco.com
	<input type="radio"/> PC <input type="text"/> <input <="" td="" type="button" value="Browse..."/>
	<input checked="" type="checkbox"/> Reset all configuration/settings to factory defaults.
<input type="button" value="Start Upgrade"/>	The device will be automatically rebooted after the update is complete