

FireSight 初期設定

2015/01/24

Rev1.0

FireSight に初めて https でログインした際に、初期設定が画面が表示されます。

※ FireSight は、すべて WebGUI からの設定となります。

初期の FireSight の IP アドレスは、192.168.45.45/24 となります。


DefaultG/W は設定されておきませんので、同じサブネットに Web アクセスできる PC 接続してください。

接続後クライアント PC から、<https://192.168.45.45> に接続してください。

ログイン用の username と Password は、admin と Sourcefire となります。

バックアップを使用してリストアする場合には、リストアにて設定が復元される為、必須項目のみで問題ございません。

<<初期設定項目一覧>>

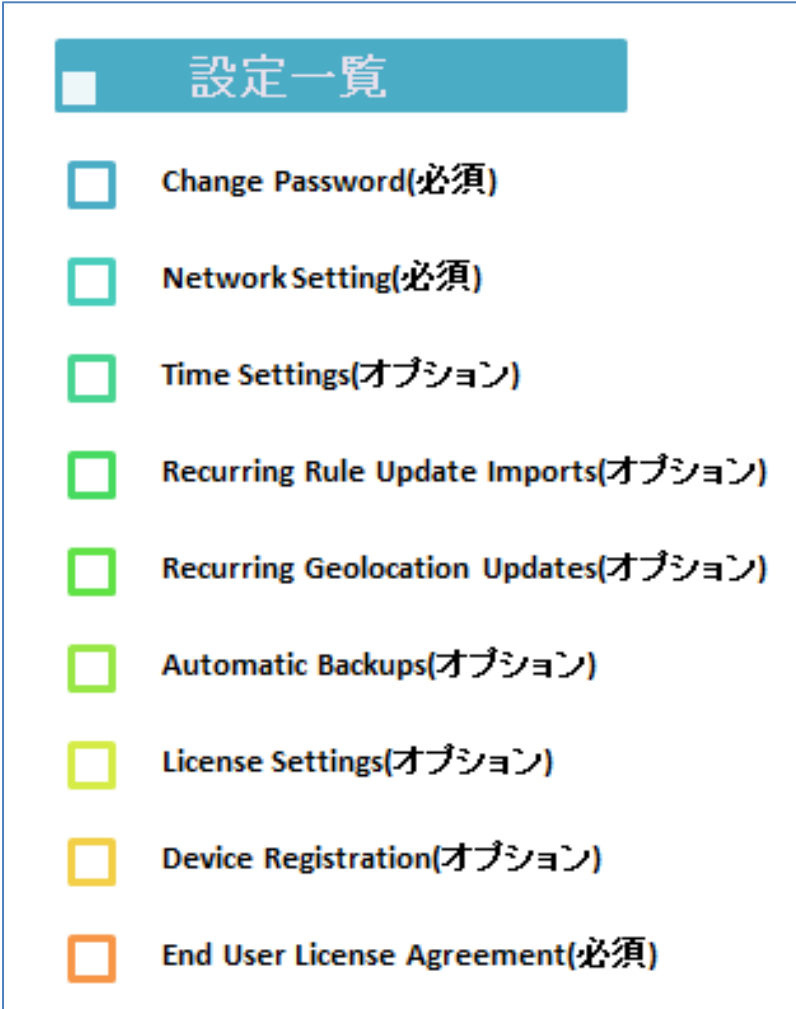

設定一覧	
<input type="checkbox"/>	Change Password(必須)
<input type="checkbox"/>	Network Setting(必須)
<input type="checkbox"/>	Time Settings(オプション)
<input type="checkbox"/>	Recurring Rule Update Imports(オプション)
<input type="checkbox"/>	Recurring Geolocation Updates(オプション)
<input type="checkbox"/>	Automatic Backups(オプション)
<input type="checkbox"/>	License Settings(オプション)
<input type="checkbox"/>	Device Registration(オプション)
<input type="checkbox"/>	End User License Agreement(必須)

Change Password (必須)

admin アカウントのパスワードを設定します。

Change Password

Use these fields to change the password for the admin account. Sourcefire recommends that you use a password that has at least eight alphanumeric characters of mixed case and includes at least one numeric character. Avoid using words that appear in a dictionary.

New Password

Confirm

Network Settings(必須)

Management インタフェースに IPv4 または IPv6 または両方の設定をします。

※この設定は、設定を apply した際に設定変更されます。

Network Settings

Use these fields to specify network-related information for the management interface on the appliance.

Protocol IPv4 IPv6 Both

IPv4 Management IP

Netmask

IPv4 Default Network Gateway

Hostname

Domain

Primary DNS Server

Secondary DNS Server

Tertiary DNS Server

Time Settings(オプション)

NTP(Manually 設定) の設定および TimeZone の設定をします。

Time Settings

Use these fields to specify how you want to set the time for the Defense Center.

Set My Clock Via NTP from
 Manually / / , :

Current Time 2015-01-24 06:45

Set Display Time Zone [America/New York](#)

Recurring Rule Update Imports(オプション)

ルール(signature) のアップデートを定期的に行うか設定します。

Recurring Rule Update Imports

Use these fields to schedule recurring rule updates.

Install Now

Enable Recurring Rule Update Imports

Recurring Geolocation Updates(オプション)

Geolocation DB のアップデートを定期的に行うか設定します。

Recurring Geolocation Updates

Use these fields to schedule recurring weekly geolocation updates. Note that updates may be large and can take up to 45 minutes.

Install Now

Enable Recurring Weekly Updates

License Settings(オプション)

ライセンスファイルをすでに用意している場合には、License Key の文字列を貼り付けて、Add/Verify ボタンをクリックしてライセンスを適用します。

License Settings

To obtain your license, navigate to <https://keyserver.sourcefire.com/> where you will be prompted for the license key (66:00:0C:29:B3:80:C5) and the activation key, which was emailed to the contact person on your support contract. Follow the on-screen instructions to generate a license, which will be emailed to you. Paste the license below and click Add/Verify. If your browser cannot access the Internet, switch to a host that can.

License Key 66:00:0C:29:B3:80:C5

Add/Verify

Device Registration(オプション)

FirePower にて、FireSight の登録準備が完了している場合には、IP(または Hostname) および Registration Key を入力して Add ボタンをクリックして FirePower を登録します。

Device Registration

Use this section to add, license, and apply initial access control policies to pre-registered devices. Note that you do not need to add devices to the secondary Defense Center in a high availability pair. If you enable the Apply Default Access Control Policies option, the applied policy for each device depends on the detection mode (Inline, Passive, Access Control, or Network Discovery) you configured for the device.

Click Add to add each device.

Apply Default Access Control Policies

Hostname/IP Address	Registration Key	Protection	Control	URL Filtering	Malware	VPN	
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Add

End User License Agreement(必須)

EULA について同意する場合には、チェックボックスをクリックして、Apply を押します。

※ この Apply は初期設定すべてを適用するという意味となります。

※ EULA に同意しない場合には、エラーとなり初期設定は出来ません。

End User License Agreement

End User License Agreement

SOURCEFIRE NETWORK SECURITY PRODUCTS

IMPORTANT: PLEASE READ THIS END USER LICENSE AGREEMENT CAREFULLY.

THIS END USER LICENSE AGREEMENT IS A LEGAL AGREEMENT BETWEEN YOU AND SOURCEFIRE LLC OR ONE OF ITS DESIGNATED SUBSIDIARIES OR AFFILIATES LICENSING THE LICENSED MATERIALS TO YOU HEREUNDER INSTEAD OF SOURCEFIRE LLC ("SOURCEFIRE"). SOURCEFIRE LLC IS A WHOLLY-OWNED SUBSIDIARY OF CISCO SYSTEMS, INC. THE TERMS AND CONDITIONS UNDER WHICH YOU MAY USE THE LICENSED MATERIALS ARE SET FORTH IN THIS END USER LICENSE AGREEMENT ("EULA"), IN ADDITION TO ANY OTHER TERMS AS MAY BE SET FORTH IN ANY SUPPLEMENTAL LICENSE AGREEMENT(S) WHICH MAY ACCOMPANY ANY SOURCEFIRE PRODUCTS (TOGETHER WITH THE EULA, THE "AGREEMENT"). BY DOWNLOADING, INSTALLING AND USING ANY OF THE SOURCEFIRE PRODUCTS, YOU ARE BINDING YOURSELF AND THE BUSINESS ENTITY THAT YOU REPRESENT (COLLECTIVELY, "YOU") TO THIS AGREEMENT AND AGREEING THAT THIS AGREEMENT WITH SOURCEFIRE IS ENFORCEABLE LIKE ANY WRITTEN CONTRACT SIGNED BY YOU.

IF YOU DO NOT AGREE TO ALL OF THE TERMS AND CONDITIONS CONTAINED IN THIS AGREEMENT, THEN SOURCEFIRE IS UNWILLING TO LICENSE THE LICENSED MATERIALS TO YOU, IN WHICH CASE YOU MAY NOT DOWNLOAD, INSTALL OR USE ANY OF THE LICENSED

I have read and agree to the End User License Agreement.

Apply

初期設定は以上となります。