


Contacts

- Adjust Contact Lists, page 1
- Add External Contacts, page 2
- Import Contact Lists, page 2

Adjust Contact Lists

You can arrange and organize your contacts.

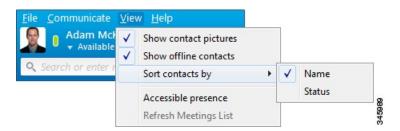

Procedure


Select View and then choose from the following options:

Option	Description
Show contact pictures	Select this option to show contact pictures. Deselect this option to hide contact pictures.
Show offline contacts	Select this option to show all contacts. Deselect this option to show only contacts who are logged in.
Sort contact by name	Select this option to arrange contacts alphabetically by name
Sort contact by status	Select this option to arrange contacts by their availability states.

Add External Contacts

Cisco Jabber lets you add contacts from chat applications such as Google Talk or Microsoft Lync.

Your system administrator must enable this feature. If you cannot add external contacts, ask your system administrator for help.



Procedure

- **Step 1** Select File > New > Contact.
- **Step 2** Enter the email address of your contact.
- **Step 3** Select a contact group.
- Step 4 Select Add.

Import Contact Lists

You can create contact lists in XML format and then import them into Cisco Jabber.

To import a contact list, do the following:

Procedure

- **Step 1** Open the main Cisco Jabber window.
- **Step 2** Select File > Import contacts....
- **Step 3** Browse to the location of the contact list definitions XML file.
- **Step 4** Select the contact list definitions file and then select **Open**.

Cisco Jabber imports the contacts from the definitions file. The contacts are available in your contact list.

Contact List Definitions

The following XML snippet shows the structure of a contact list definitions file:

The following table describes the elements in a contact list definitions file:

Element	Description
<pre><?xml version="1.0" encoding="utf-8"?></pre>	XML declaration. Your definitions file must contain an XML declaration with the following attributes:
	version
	Specifies the version of the XML file.
	encoding
	Specifies the encoding. You must use utf-8.
buddylist	Root element of the contact list definition.
group	Parent element of a contact group. One group can contain multiple users.
	There is no limit to the number of users a group can contain. There is also no limit to the number of groups you can include in a contact list definitions file.
	However, your server sets a restriction to the number of contacts that you can add to Cisco Jabber. You must ensure you do not exceed that limit in your contact list definitions file.

Element	Description
gname	Specifies the name of the group.
user	Parent element that holds details for a single user.
uname	Specifies the instant messaging (IM) address of a user.
fname	Specifies the name that displays in the client user interface.

Example Contact List

The following is an example XML definition of a contact list that you can import into Cisco Jabber:

```
<?xml version="1.0" encoding="utf-8"?>
<buddylist>
  <group>
    <gname>Sales
    <user>
      <uname>amckenzi@example.com</uname>
      <fname>Adam McKenzie</fname>
    </user>
    <user>
      <uname>aperez@example.com</uname>
      <fname>Anita Perez</fname>
    </user>
  </group>
  <group>
    <gname>Marketing
    <user>
      <uname>nfox@example.com</uname>
      <fname>Nancy Fox</fname>
    </user>
  </group>
</buddylist>
```